

WAAS CH 65641 W22A	APP CRS 217°	Rwy Ldg TDZE Apt Elev	5500 904 904
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

BOLTON FLD (TZR)

⚠


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using John Glenn Columbus Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received use John Glenn Columbus Intl setting and increase LPV DA to 1196 feet and LNAV/VNAV DA to 1382 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ SM, and LNAV Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 2700 direct
WATIG and hold.

AWOS-3PT 135.925	COLUMBUS APP CON 134.0 279.6	BOLTON TOWER★ 128.1 (CTAF) 0	GND CON 121.8
----------------------------	--	--	-------------------------

RADAR REQUIRED

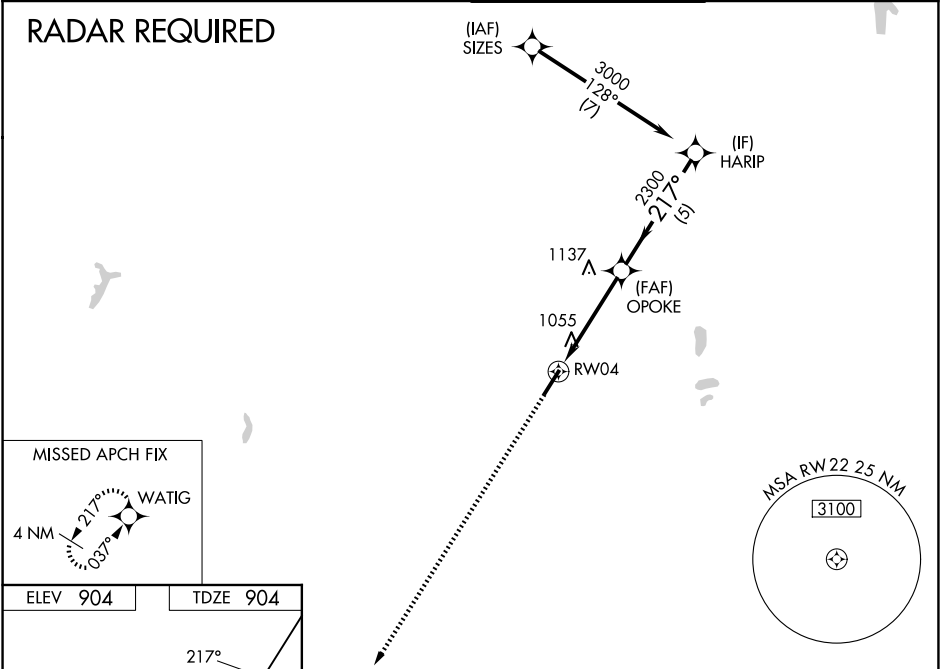

ELEV 904	TDZE 904	2700 WATIG ↑				VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 25).			
217°		* LNAV only.		OPOKE		HARIP		3000	
5500 X 100		RW22		* 1.2 NM to RW22		2300		GP 3.00° TCH 40	
TWR★		1.2 NM		3.1 NM		5 NM			
		CATEGORY		A		B		C	
		LPV DA		1154-7/8		250 (300-7/8)			
		LNAV/VNAV DA		1339-1½		435 (500-1½)			
		LNAV MDA		1320-1 416 (500-1)		1320-1½ 416 (500-1½)			
		CIRCLING		1360-1 456 (500-1)		1380-1 476 (500-1)		1380-1½ 476 (500-1½)	
								1500-2 596 (600-2)	