


WAAS CH 72715 W33A	APP CRS 327°	Rwy Idg TDZE Apt Elev	4201 322 322
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 33

SKYHAVEN (DAW)

RNP APCH - GPS.	ODALS	MISSED APPROACH: Climb to 3800 direct TRASS and hold, continue climb-in-hold to 3800.
Inop table does not apply to LPV and LNAV/VNAV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV visibility Cat C to 1½ SM.		

ASOS 135.275	BOSTON APP CON 125.05 269.4	UNICOM 122.7 (CTAF) 0
------------------------	---------------------------------------	---------------------------------

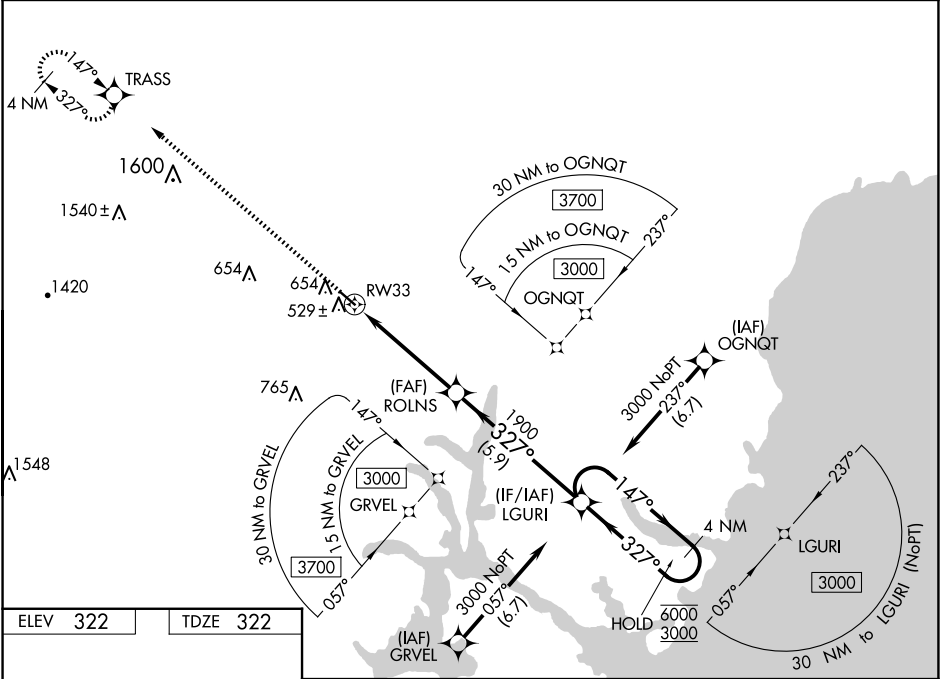

ELEV 322

TDZE 322

3800 TRASS

↑

4201 X75

0.5% Up

327°

3000

3700

30 NM to GRVEL

15 NM to GRVEL

30 NM to OGNQT

15 NM to OGNQT

3000 NoPT

3000

3700

30 NM to LGURI

15 NM to LGURI

3000 NoPT

3000

3700

30 NM to LGURI (NoPT)

4 NM Holding Pattern

LGURI

147° → 6000

← 327° 3000

GP 3.00°

TCH 43

1.3 NM

3.5 NM

5.9 NM

1.3 NM to RW33

ROLNS

1900

1900

CATEGORY	A	B	C	D
LPV DA	572-¾	250 (300-¾)		NA
LNAV/VNAV DA	699-1	377 (400-1)		NA
LNAV MDA	780-¾	458 (500-¾)	780-1⅛ 458 (500-1⅛)	NA
CIRCLING	960-1	638 (700-1)	960-1¾ 638 (700-1¾)	NA

REIL Rwy 15 0

MIRL Rwy 15-33 0