

WAAS CH 40324 W19A	APP CRS 193°	Rwy Idg TDZE 804 Apt Elev 817
--	------------------------	---

RNAV (GPS) RWY 19

DOUGLAS HUNTER FLD (1M5)

RNP APCH.



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using Bowling Green altimeter setting. When local altimeter setting not received, use Bowling Green altimeter setting and increase LPV DA to 1144 and all visibilities ¼ mile; increase all LNAV/VNAV DA to 1184 and all visibilities ¼ mile; increase all MDA 100 feet and increase LNAV Cat C/D visibility ⅜ mile.

MISSED APPROACH: Climb to 3000 direct COLBU and hold.

AWOS-3PT 118.175	NASHVILLE APP CON 119.35 372.0	UNICOM 122.975 (CTAF) 0
----------------------------	--	-----------------------------------

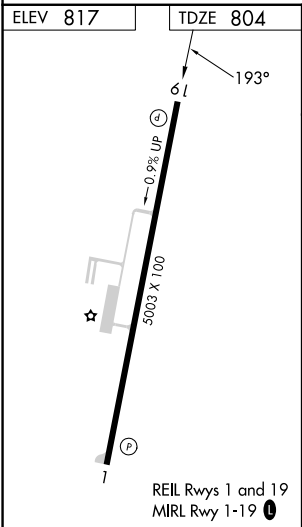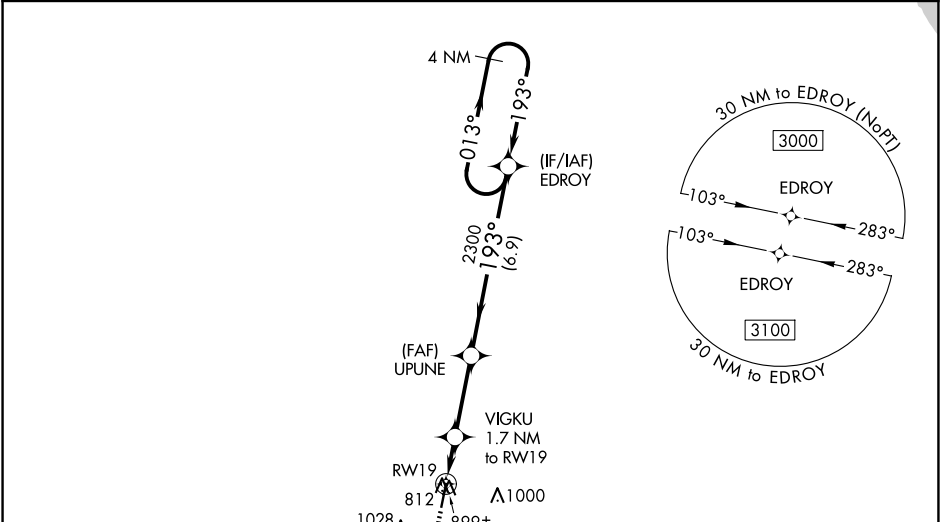

ELEV 817		TDZE 804	
1300 A		3000 COLBU	
*LNAV only.		VGSi and RNAV glidepath not coincident.	
RWY 19		VIGKU 1.7 NM to RWY 19	
1.2 NM		UPUNE 2300	
0.5		EDROY	
3 NM		4 NM Holding Pattern	
6.9 NM		GP 3.00° TCH 40	
CATEGORY	A	B	C
LPV DA	1054-1	250 (300-1)	
LNAV/VNAV DA	1094-1½	290 (300-1½)	
LNAV MDA	1160-1	356 (400-1)	