

WAAS CH 40328 W25A	APP CRS 251°	Rwly Idg TDZE 781 Apt Elev 781	5001
--	------------------------	--	-------------

RNAV (GPS) RWY 25


ROCHELLE MUNI/KORITZ FLD (RPJ)

Baro-VNAV NA when using Chicago/Rockford Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

When local altimeter setting not received, use Chicago/Rockford Intl altimeter setting: increase LPV DA to 1079 feet and LNAV/VNAV DA to 1152 feet and all MDA 60 feet; increase LNAV/VNAV visibility all Cats and LNAV Cat C/D visibility ½ mile; increase Circling Cat C visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA. VDP NA when using Chicago/Rockford Intl altimeter setting.

MISSED APPROACH:
Climb to 2600 direct BATBE and hold.

AWOS-3 125.2	ROCKFORD APP CON 126.0 327.0	UNICOM 122.975 (CTAF) 0
------------------------	--	-----------------------------------

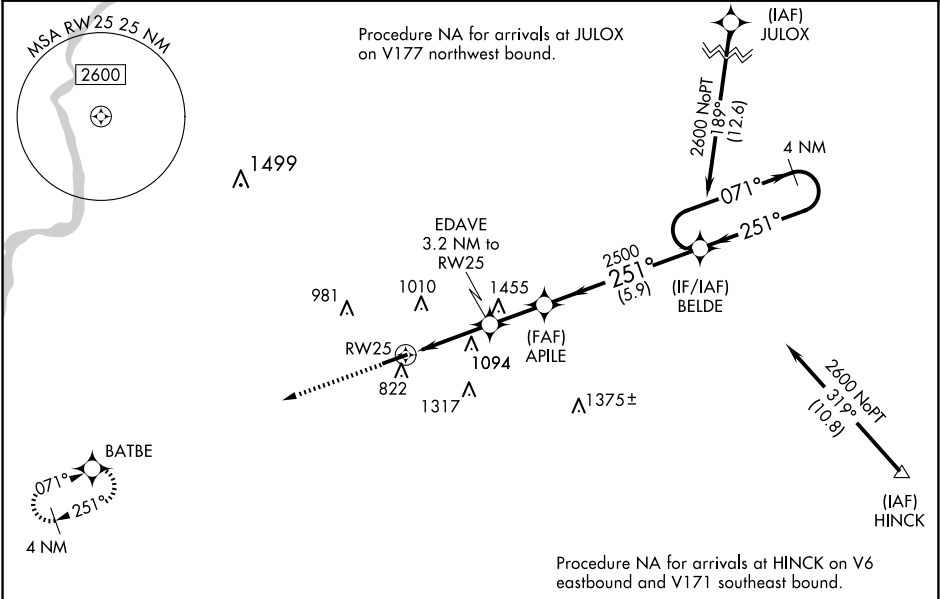

ELEV 781	TDZE 781
-----------------	-----------------

