

APP CRS
359°

Rwy Ldg
TDZE
1321

Apt Elev
1321

RNAV (GPS) RWY 36

FLOYD W JONES LEBANON (LBO)


RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using OZS altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 36 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use OZS altimeter setting: increase LNAV/VNAV DA to 1675 feet; increase all MDAs 100 feet and LNAV visibility Cats C and D ¾ SM, and Circling visibility Cats C and D ½ SM.

MISSED APPROACH: Climb to 3500 direct WIKGI and hold.

AWOS-3PT 118.975	SPRINGFIELD APP CON 121.1 290.5	CLNC DEL 123.725	UNICOM 122.8 (CTAF) 0
----------------------------	---	----------------------------	---------------------------------

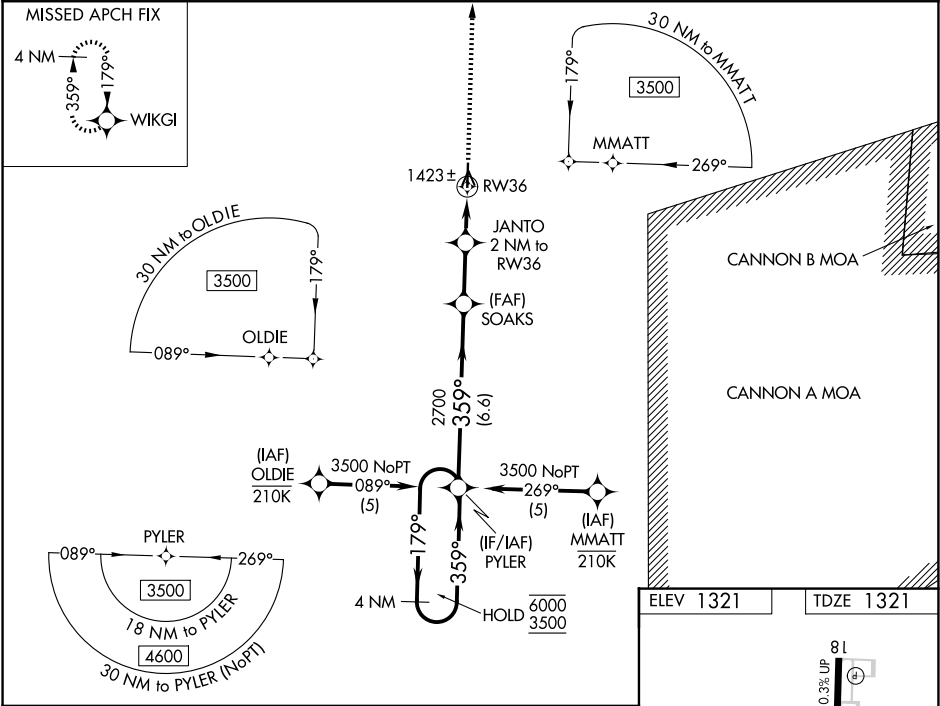

4 NM Holding Pattern 6000 ← 179° 3500 → 359° GP 3.00° TCH 40		PYLER		SOAKS		JANTO 2 NM to RW36		3500 ↑		WIKGI ✦	
		359° 2700 2700 2000 6.6 NM 2.2 NM 1 NM 1 NM		359° 2700 2000 1 NM to RW36 RW36		5000 X 75 36 359°					
CATEGORY	A	B	C	D							
LNNAV/ VNAV	DA	1592-1 271 (300-1)									
LNNAV	MDA	1680-1 359 (400-1)									
CIRCLING	1780-1 459 (500-1)	1860-1 539 (600-1)	1980-1¾ 659 (700-1¾)	1980-2 659 (700-2)	REIL Rwy 18 and 36 ① MIRL Rwy 18-36 ①						