

LOC/DME I-RRR <u>110.9</u> Chan 46	APP CRS 311°	Rwy Ldg 8373 TDZE 523 Apt Elev 607
--	------------------------	---

ILS or LOC RWY 31R
DALLAS-FORT WORTH INTL (DFW)


T Simultaneous approach authorized. DME required.
For inop ALS increase S-LOC 31R GUKSE FIX minimums
Cat C/D visibility to RVR 5500.




MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 on heading 125° and TTT VOR/DME R-084 to SOLDO/TTT 35.8 DME and hold.

D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775		126.55 127.5 EAST	121.65 121.8 EAST		
DEP 135.925	135.5 125.2	124.15 134.9 WEST	121.85 WEST	128.25	

RADAR REQUIRED

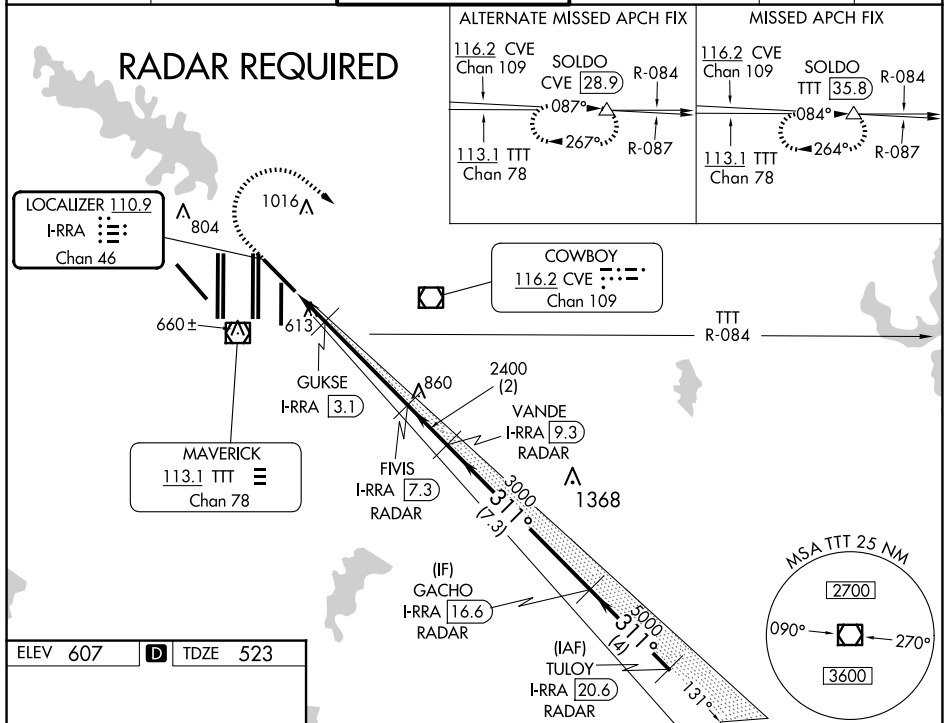

ELEV 607	D	TDZE 523
----------	----------	----------

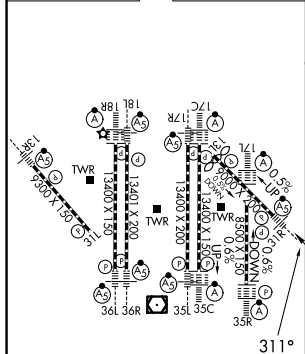

HIRL all Rwy's					
REIL Rwy's 13L and 31L					
TDZ/CL all Rwy's except 13L and 31L					
FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

1100 3000 hdg 125°	TTT R-084 	SLD0 				
CATEGORY	A		B		C	D
S-ILS 31R	723/18		200 (200-½)			
S-LOC 31R	1060/24	537 (500-½)	1060/55 537 (500-1¼)			
GUKSE FIX MINIMUMS						
S-LOC 31R	880/24	357 (300-½)	880/30		357 (300-¾)	