

WAAS CH 58109 W02A	APP CRS 021°	Rwy Idg TDZE 913 Apt Elev 913	7026 913
--	------------------------	---	---------------------------

RNAV (GPS) RWY 2
DE KALB TAYLOR MUNI (DKB)


▼ Baro-VNAV NA when using Aurora altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA when using Aurora altimeter setting. When local altimeter setting not received, use Aurora altimeter setting and increase all DA 61 feet and all MDA 80 feet; increase all LPV and LNAV/VNAV visibilities, LNAV Cats C/D visibility, and Circling Cats C/D visibility ¼ mile. For inop MALSR, increase LPV all Cats visibility to 1.

MALSR




MISSED APPROACH: Climb to 3000 direct JUDVI and via 057° track to YEARN and hold.

AWOS-3 119.075	CHICAGO APP CON 133.5 349.0	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

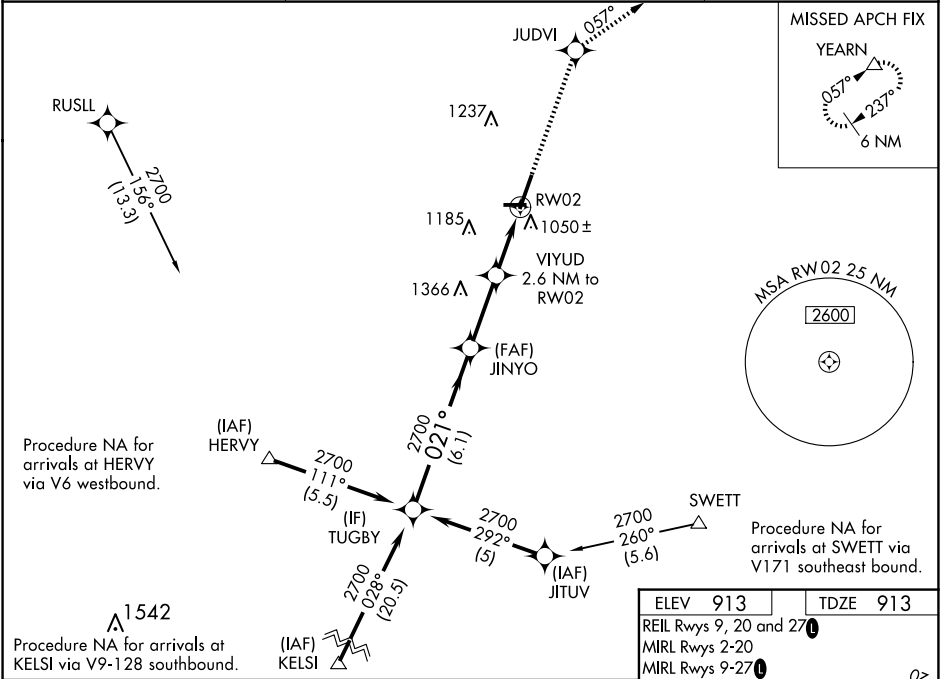

Procedure Turn NA		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 53).				3000	JUDVI	tr 057°	YEARN
TUGBY		JINYO							
2700		2700				2700		2700	
GP 3.00° TCH 55		*1800				*1.2 NM to RW02		*LNAV only.	
6.1 NM		2.8 NM		1.4 NM		1.2 NM			
CATEGORY	A		B		C		D		
LPV DA			1207-1/2		294 (300-1/2)				
LNAV/VNAV DA			1360-1		447 (500-1)				
LNAV MDA	1360-1/2		447 (500-1/2)		1360-3/4		1360-1		
					447 (500-3/4)		447 (500-1)		
CIRCLING	1360-1		1500-1		1600-2		1740-2 3/4		
	447 (500-1)		587 (600-1)		687 (700-2)		827 (900-2 3/4)		

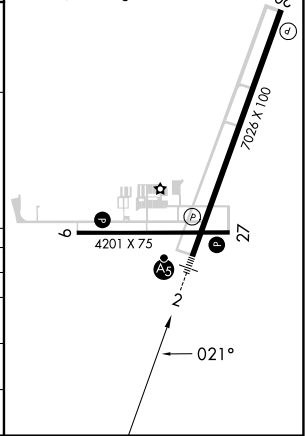

EC-3, 04 SEP 2025 to 02 OCT 2025

EC-3, 04 SEP 2025 to 02 OCT 2025