

WAAS
CH **72907**
W26A

APP CRS
261°

Rwy Idg **5263**
TDZE **910**
Apt Elev **912**

RNAV (GPS) RWY 26
NEIL ARMSTRONG (AXV)

RNP APCH - GPS.


▽

△NA

Baro-VNAV NA when using Lima altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 26 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Lima altimeter setting and increase LPV DA to 1291 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1324 feet and all visibilities ½ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
ZUKEC and hold.

AWOS-3PT 128.325	COLUMBUS APP CON 134.45 294.5	UNICOM 122.8 (CTAF)	122.7
----------------------------	---	-------------------------------	--------------

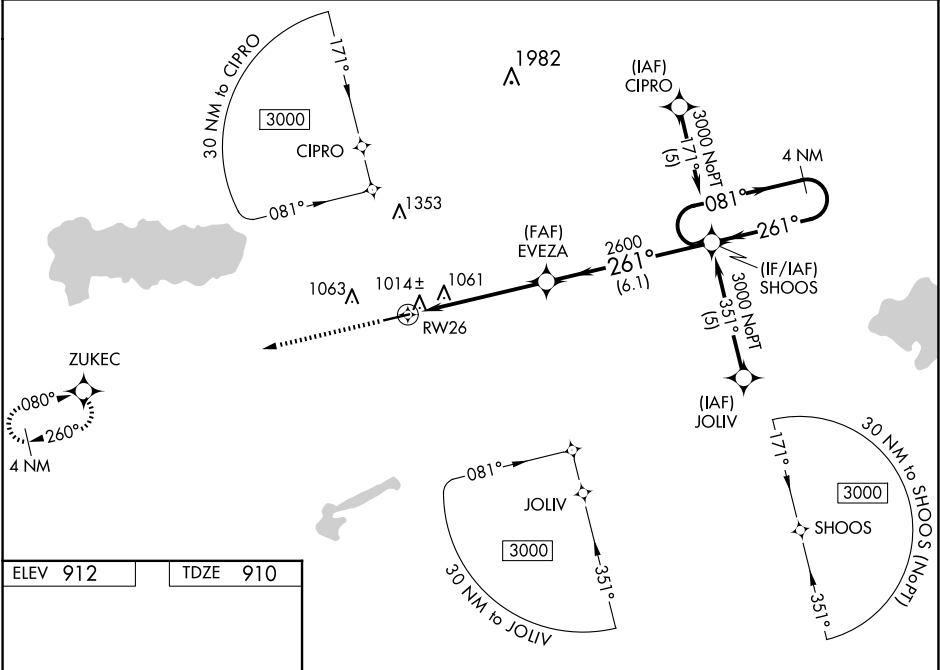

ELEV 912

TDZE 910

3000

ZUKEC

261°

261°

5500 X 100

8

8

0

0

0

5.1 NM

6.1 NM

3000

4 NM Holding Pattern

GP 3.00°

TCH 40°

CATEGORY	A	B	C	D
LPV DA	1241-1¼	331 (400-1¼)		NA
LNAV/VNAV DA	1274-1¼	364 (400-1¼)		NA
LNAV MDA	1440-1	530 (600-1)	1440-1½ 530 (600-1½)	NA

WAPAKONETA, OHIO

Orig-C 07SEP23

40°30'N-84°18'W

RNAV (GPS) RWY 26

NEIL ARMSTRONG (AXV)

EC-2, 04 SEP 2025 to 02 OCT 2025