

WAAS CH 49132 W22A	APP CRS 224°	Rwy Ldg TDZE Apt Elev	4001 823 823
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

CLINTON RGNL (GLY)

RNP APCH.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Whiteman AFB altimeter setting and increase all DA 61 feet and all MDA 80 feet. Increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ mile. Circling Rwy 4 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Whiteman altimeter setting.

MISSED APPROACH: Climb to 3000 direct SOGOY and hold.

AWOS-3PT 120.475	WHITEMAN APP CON ★ 127.45	UNICOM 122.8 (CTAF) 0
----------------------------	-------------------------------------	---------------------------------

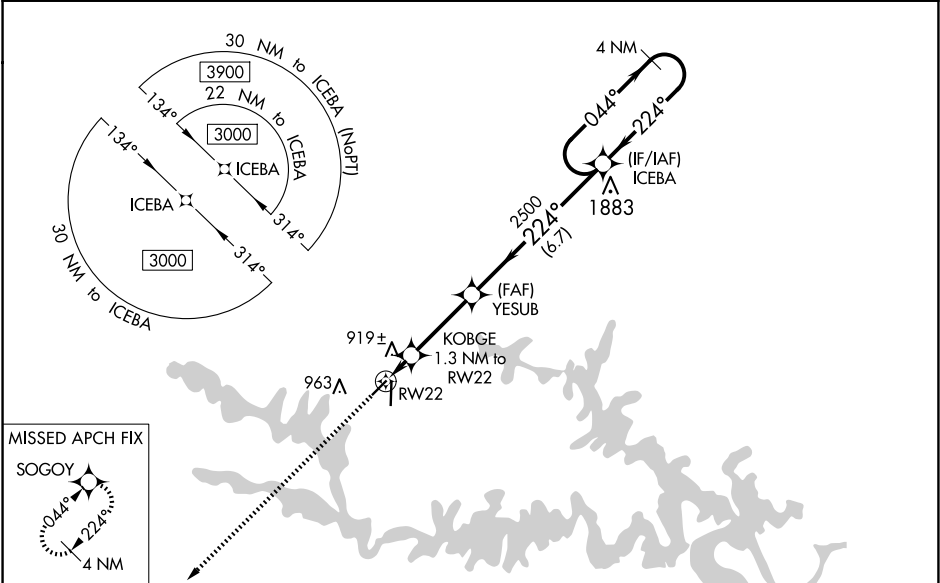

ELEV 823	TDZE 823
----------	----------

224°

81

4001 X 60

5000 X 75

36

3000

SOGOY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 39).

*LNAV only.

KOBGE 1.3 NM to RW22

YESUB 2500

ICEBA 4 NM Holding Pattern

044°

224°

3000

GP 3.50° TCH 51

1.3 NM

3.1 NM

6.7 NM

CATEGORY	A	B	C	D
LPV DA	1115-1	292 (300-1)		NA
LNAV/VNAV DA	1216-1½	393 (400-1½)		NA
LNAV MDA	1180-1	357 (400-1)		NA
CIRCLING	1280-1 457 (500-1)	1300-1 477 (500-1)	1340-1½ 517 (600-1½)	NA