

WAAS

CH **86532**

W33A

APP CRS

332°

Rwy Idg

3399

TDZE

1125

Apt Elev

1127

RNAV (GPS) RWY 33

WASECA MUNI/MAYNARD RICHARD STENSRUD FLD (A/CQ)


▼

▲

When local altimeter setting not received, use Owatonna altimeter setting and increase all MDAs 40 feet, increase LP and LNAV Cat C visibility ½ mile and Circling Cat C visibility ⅓ mile. DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 direct WITUD and hold.

AWOS-3 118.425	MINNEAPOLIS CENTER 135.0 306.9	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

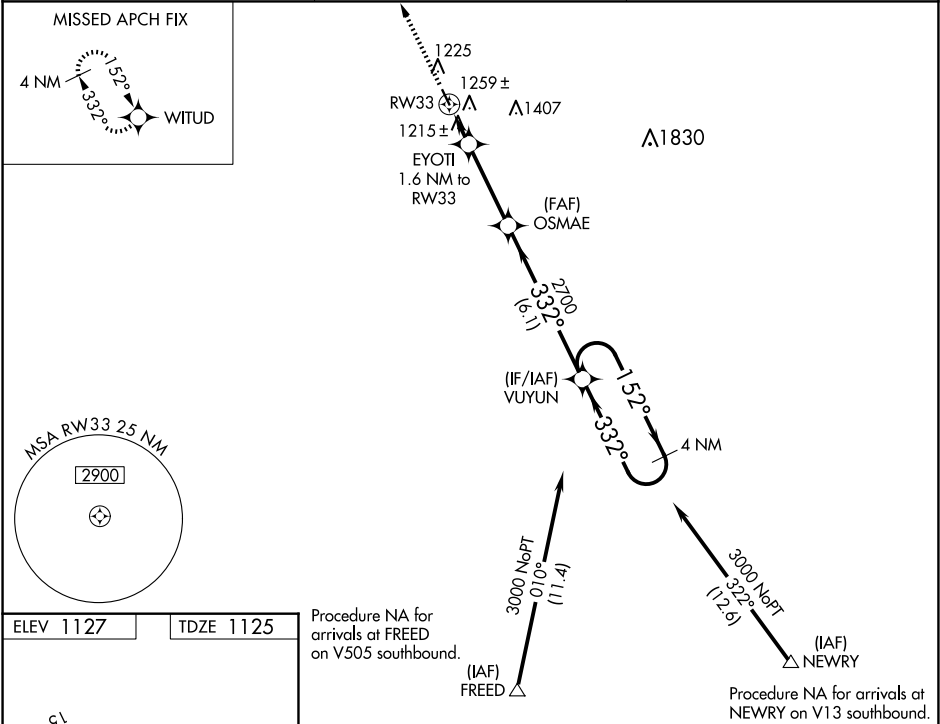

3000 WITUD		Visual Segment - Obstacles		VUYUN 4 NM Holding Pattern	
1.6 NM		3.2 NM		6.1 NM	
CATEGORY	A	B	C	D	
LP MDA	1480-1 355 (400-1)			NA	
LNAV MDA	1520-1	395 (400-1)	1520-1½ 395 (400-1½)	NA	
CIRCLING	1560-1 433 (500-1)	1620-1 493 (500-1)	1760-1½ 633 (700-1½)	NA	