

WAAS CH 99517 W05A	APP CRS 048°	Rwy Idg 5002 TDZE 996 Apt Elev 1013
--	------------------------	--

RNAV (GPS) RWY 5

PICKENS COUNTY (LQK)


▼

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Clemson altimeter setting and increase LPV DA to 1292 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1487 feet; increase all MDAs 60 feet and LNAV Cat C and Circling Cat D visibility ½ SM, and LNAV Cat D visibility ½ SM. Baro-VNAV NA when using Clemson altimeter setting. VDP NA with Clemson altimeter setting.

MISSED APPROACH:
Climb to 4000 direct YACUD and hold.

AWOS-3 120.0	GREER APP CON ★ 118.8 270.275	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

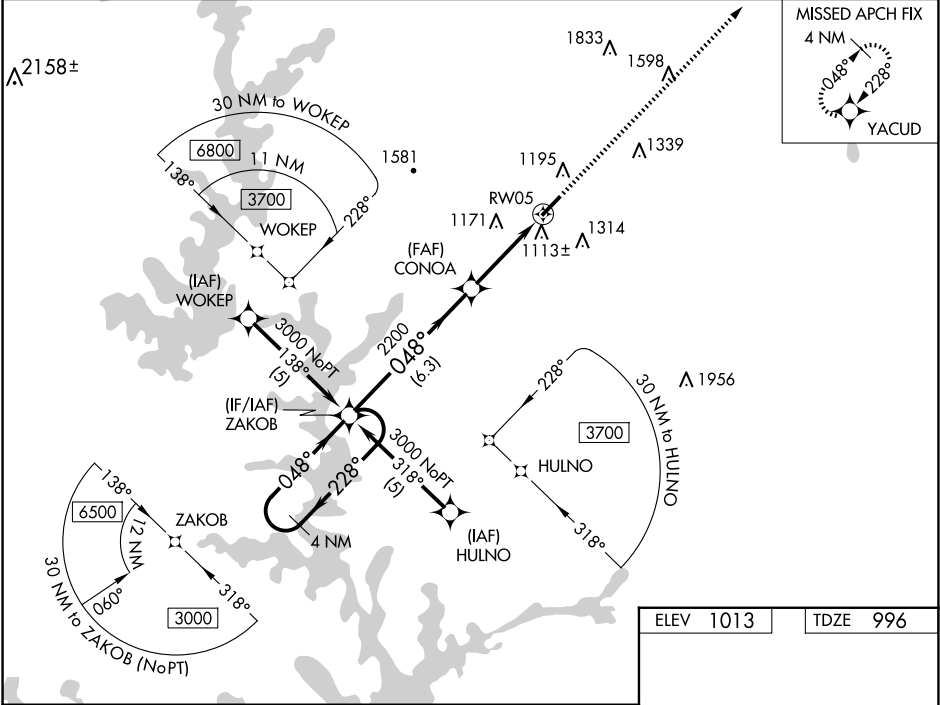

4 NM Holding Pattern	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).	4000	YACUD
3000 ← 228°	→ 048°	2200	* RNAV only
GP 3.00° TCH 45		CONOA	
		2200	
		1.2 NM to RW05	
		RW05	
		6.3 NM	2.5 NM
CATEGORY	A	B	C
LPV DA	1246-1	250 (300-1)	
LNAV/VNAV DA	1441-1¾	445 (500-1¾)	
LNAV MDA	1380-1	384 (400-1)	1380-1½ 384 (400-1½)
CIRCLING	1560-1 547 (600-1)	1620-1 607 (700-1)	1620-1¾ 607 (700-1¾) 1780-2½ 767 (800-2½)

