

WAAS CH 82327 W36A	APP CRS 002°	Rwy Idg 4000 TDZE 681 Apt Elev 698
--	------------------------	---


RNAV (GPS) RWY 36
JASPER COUNTY (RZL)

RNP APCH.

T Baro-VNAV NA when using Knox altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. When local altimeter setting not received use Knox altimeter setting and increase all DA 78 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all Cats visibility $\frac{1}{8}$ mile and LNAV and Circling Cat C visibility $\frac{1}{4}$ mile. Rwy 36 helicopter visibility reduction below 1 SM NA. Circling NA to Rwy 9 and 27.

MISSED APPROACH:
Climb to 2600 direct
JTVI and hold.

AWOS-3P 119.175	CHICAGO CENTER 132.5 284.7	UNICOM 122.8 (CTAF) 0
---------------------------	--------------------------------------	---------------------------------

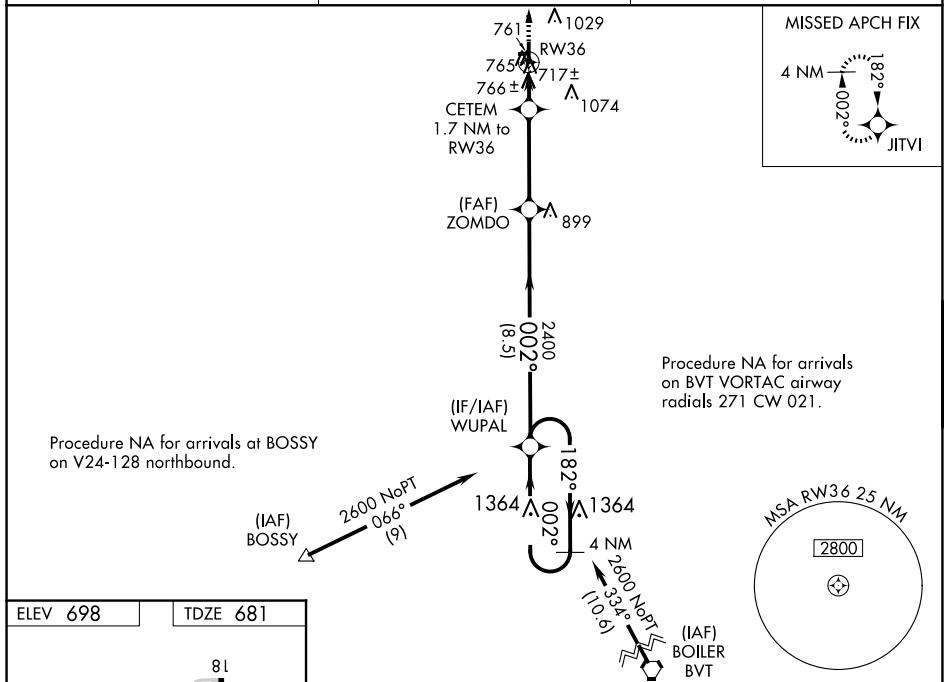

ELEV 698		TDZE 681
----------	--	----------

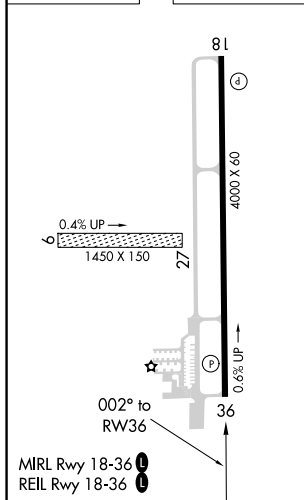


Diagram illustrating the ZOMDO 2400 holding pattern and associated navigation information:

- Navigation Aids:** J1T1 VORTAC, 2600 frequency.
- Waypoints and Distances:**
 - RW36 to CETEM: 1.7 NM
 - CETEM to RW36: 1.7 NM
 - RW36 to ZOMDO 2400: 1.7 NM + 3.6 NM = 5.3 NM
 - ZOMDO 2400 to WUPAL 2600: 8.5 NM
- Holding Pattern:** 4 NM Holding Pattern, GP 3.00° TCH 40.
- Angles:** 182°, 002°, 182°, 002°.