


▼

▲

Visibility reduction by helicopters NA. When local altimeter setting not received, use Daniel Field altimeter setting and increase all MDAs 80 feet and visibility Cat C ¼ SM and Cat D ½ SM.

MISSED APPROACH:  
Climbing right turn to 2400  
direct IRQ VORTAC and hold.

|                   |                                   |                          |
|-------------------|-----------------------------------|--------------------------|
| AWOS-3<br>120.625 | AUGUSTA APP CON ★<br>124.45 270.3 | UNICOM<br>122.8 (CTAF) ① |
|-------------------|-----------------------------------|--------------------------|

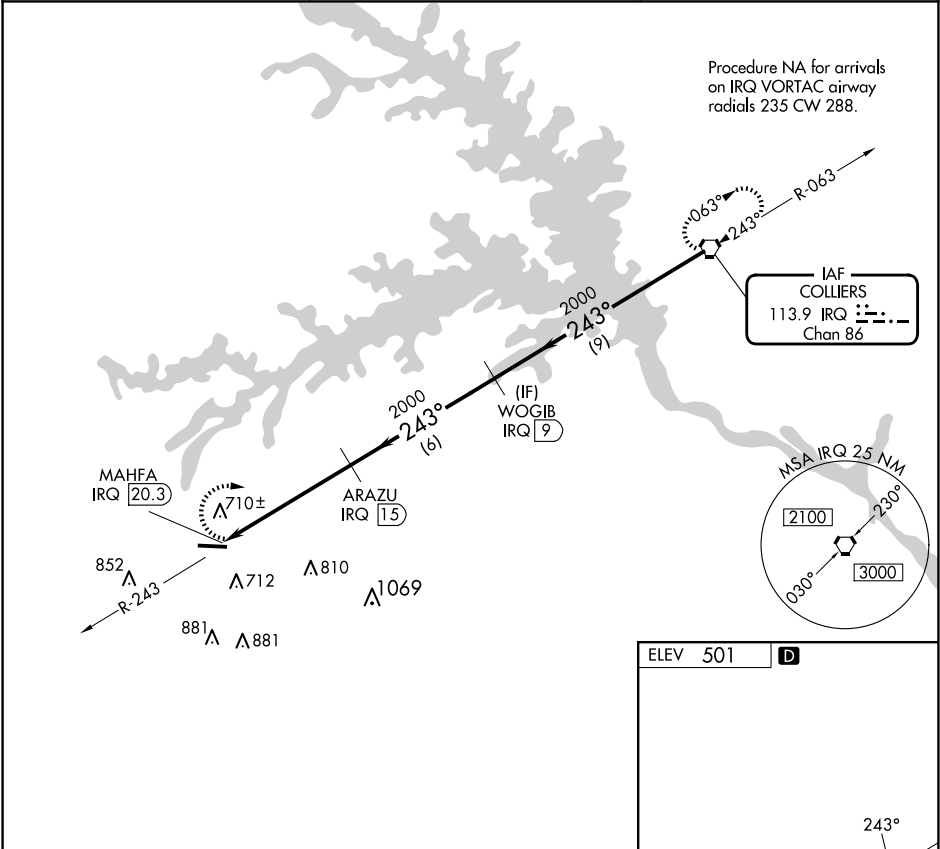

|          |                       |                         |                         |                         |
|----------|-----------------------|-------------------------|-------------------------|-------------------------|
| 2400     | IRQ                   |                         |                         |                         |
|          |                       | MAHFA<br>IRQ 20.3       | ARAZU<br>IRQ 15         | WOGIB<br>IRQ 9          |
|          |                       |                         |                         | IRQ<br>VORTAC           |
|          |                       | 2000                    | 2000                    | 2000                    |
|          |                       | 5.3 NM                  | 6 NM                    | 9 NM                    |
| CATEGORY | A                     | B                       | C                       | D                       |
| CIRCLING | 1060-1<br>559 (600-1) | 1080-1¼<br>579 (600-1¼) | 1160-1¾<br>659 (700-1¾) | 1240-2¼<br>739 (800-2¼) |

