

WAAS
CH **70719**
W32A

APP CRS
323°

Rwy Ldg **4101**
TDZE **1766**
Apt Elev **1766**

RNAV (GPS) RWY 32
CORRY-LAWRENCE (8G2)

RNP APCH - GPS.

▼

▲ NA


Rwy 32 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. Use JHW altimeter setting; when not received, use GKI altimeter setting and increase LPV DA to 2140 feet; increase LNAV/VNAV DA to 2386 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM. Procedure NA at night.

MISSED APPROACH:
Climb to 3600 direct EKOYE and hold.

JHW AWOS-3PT
118.425

BUFFALO APP CON ★
121.0 257.8

UNICOM
122.8 (CTAF) 0

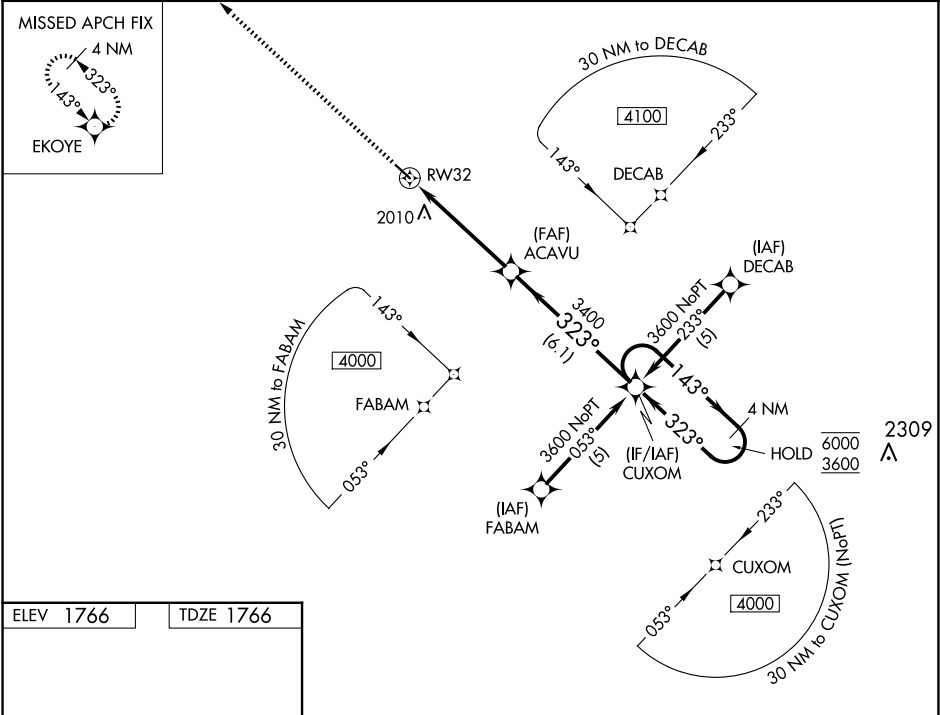

ELEV 1766

TDZE 1766

3600

EKOYE

↑

✧

ACAVU

3400

323°

4.9 NM

6.1 NM

CUXOM

4 NM Holding Pattern

143°

6000

3600

GP 3.00°

TCH 40

REIL Rws 14 and 32 0

MIRL Rwy 14-32 0

CATEGORY	A	B	C	D
LPV DA	2078-1 312 (400-1)			NA
LNAV/VNAV DA	2324-1½ 558 (600-1½)			NA
LNAV MDA	2340-1 574 (600-1)		2340-1½ 574 (600-1½)	NA