


APP CRS	Rwy Idg	3803
280°	TDZE	422
	Apt Elev	424

RNAV (GPS) RWY 28


WILLIAMSON/SODUS (SDC)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct GOYER and hold.
Procedure NA at night. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Rochester altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ¼ SM.		

AWOS-3 124.2	ROCHESTER APP CON 119.55 269.6	UNICOM 122.8 (CTAF) 0
-----------------	-----------------------------------	--------------------------

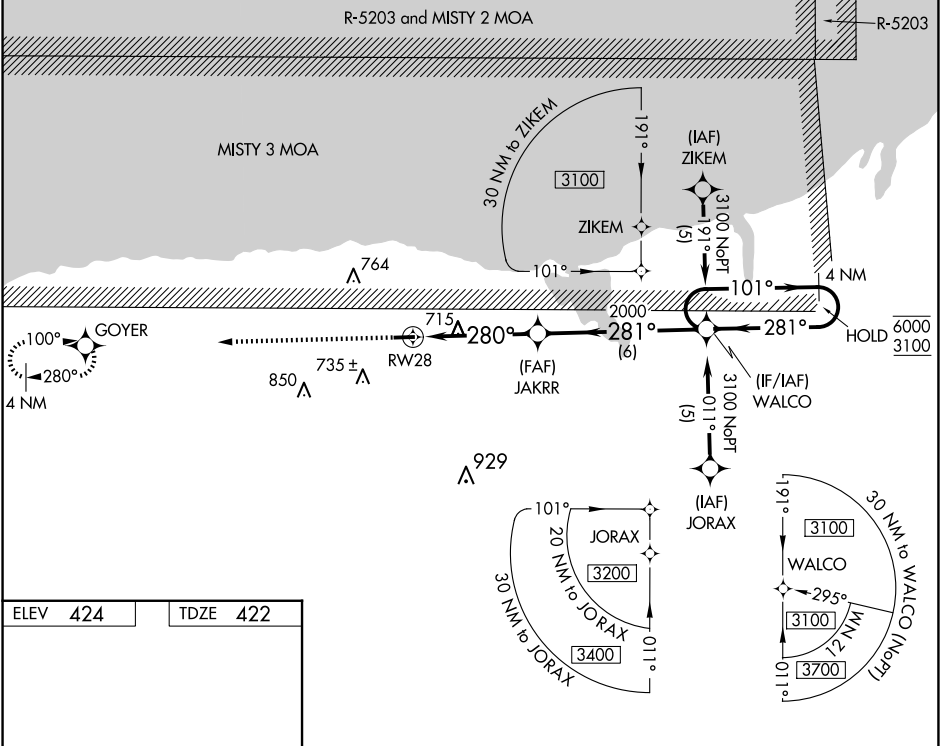

ELEV 424	TDZE 422
----------	----------

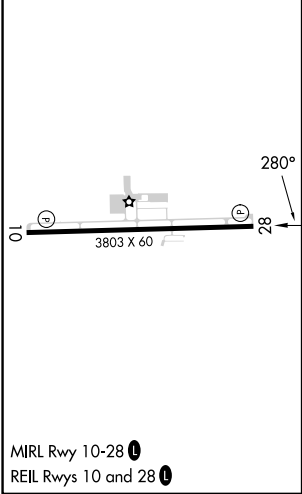

3000 ↑		GOYER 		4 NM Holding Pattern	
RW28 		JAKRR * 2000		WALCO	
280°		281°		101° → 6000 ← 281° 3100	
≤ 3.20° TCH 43					
4.5 NM		6 NM			
CATEGORY	A	B	C	D	
LNAV MDA	980-1	558 (600-1)	980-1½ 558 (600-1½)	NA	
 CIRCLING	1000-1 576 (600-1)	1020-1 596 (600-1)	1120-2 696 (700-2)	NA	