

LOC/DME I-HZR
111.9
Chan **56**

APP CRS
004°

Rwy Idg
TDZE **36**
Apt Elev **39**

LOC RWY 36
FALSE RIVER RGNL (HZR)

When local altimeter setting not received, use Baton Rouge altimeter setting and increase all MDA 60 feet; increase S-36 Cat C/D visibility to 1½ SM and Circling Cat C to 1¼ SM.


ODALS
⬇

MISSED APPROACH: Climb to 700 then climbing right turn to 2000 direct LSU VORTAC and hold.

AWOS-3PT
121.250

BATON ROUGE APP CON★
120.3 278.3

UNICOM
122.8 (CTAF) 0

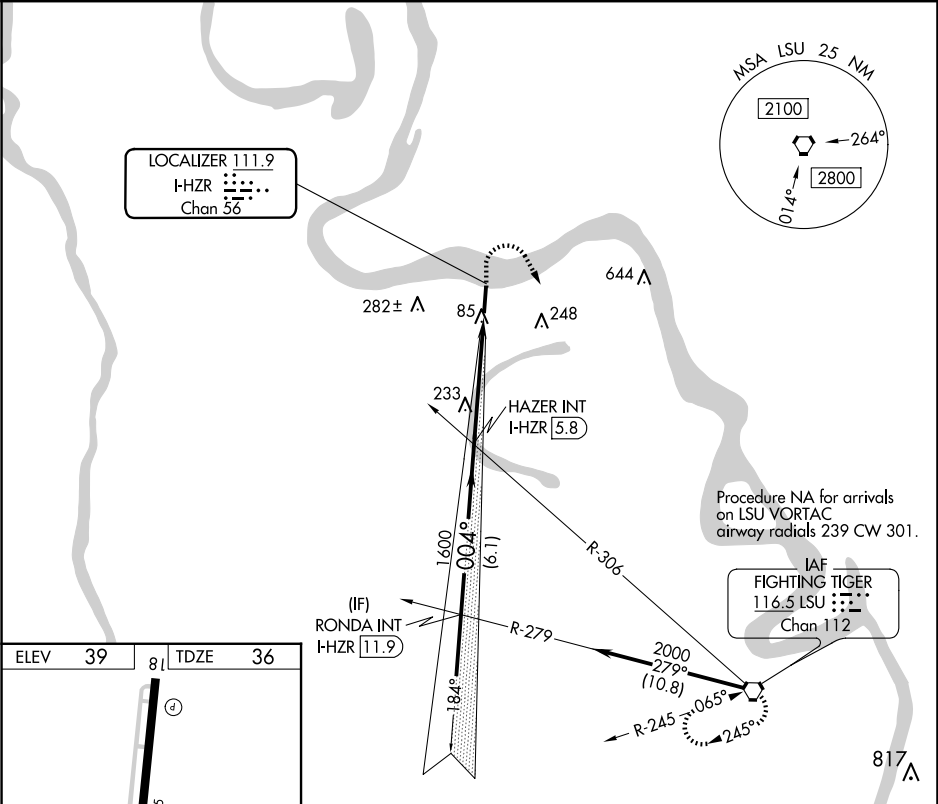

ELEV 39 81 TDZE 36

5003 X 75

004° 4.8 NM from FAF

36

MIRL Rwy 18-36

REIL Rwy 18

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

RONDA INT I-HZR 11.9

HAZER INT I-HZR 5.8

700

2000

LSU

2000

004°

1600

3.00°

TCH 50

6.1 NM

3.5 NM

1.3

CATEGORY	A	B	C	D
S-36	500-¾ 464 (500-¾)		500-1¼ 464 (500-1¼)	
CIRCLING	500-1 461 (500-1)	520-1 481 (500-1)	600-1½ 561 (600-1½)	600-2 561 (600-2)

SC-4, 04 SEP 2025 to 02 OCT 2025

SC-4, 04 SEP 2025 to 02 OCT 2025