

WAAS CH 78428 W08A	APP CRS 080°	Rwy Idg 4601 TDZE 831 Apt Elev 836
--	------------------------	---


RNAV (GPS) RWY 8

BLACK RIVER FALLS AREA (BCK)

V **A** Baro-VNAV NA when using La Crosse altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38°C (100°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA with La Crosse altimeter setting. When local altimeter setting not received, use La Crosse altimeter setting: increase LPV DA to 1172 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1441 feet and visibility all Cats ½ SM; increase all MDA 100 feet and visibility LNAV Cat B ¼ SM, Cat C and D ½ SM and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 3500 direct
ZELED and hold.

AWOS-3PT 119.125	MINNEAPOLIS CENTER 128.6 363.0	CTAF 122.9 0
----------------------------	--	------------------------

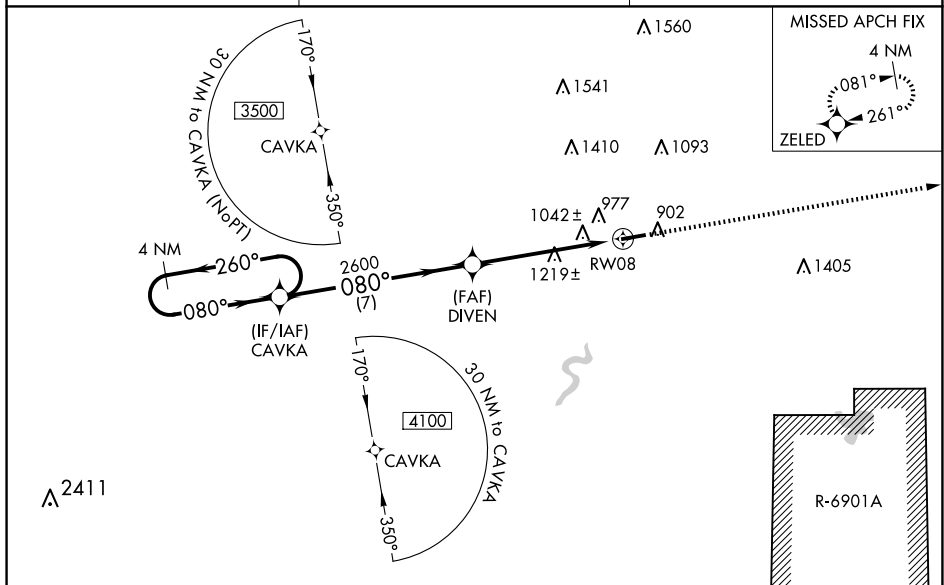

EC-3, 04 SEP 2025 to 02 OCT 2025

4 NM Holding Pattern

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 27).

3500

260°

080°

GP 3.00° TCH 40

CAVKA

DIVEN 2600

* 2 NM to RW08

RW08

7 NM

3.5 NM

2.0 NM

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	1081- $\frac{7}{8}$	250 (300- $\frac{7}{8}$)		
LNAV/VNAV DA	1350-1 $\frac{3}{4}$	519 (600-1 $\frac{3}{4}$)		
LNAV MDA	1480-1	649 (700-1)	1480-1 $\frac{7}{8}$	649 (700-1 $\frac{7}{8}$)
CIRCLING	1480-1	644 (700-1)	1520-2 684 (700-2)	1760-3 924 (1000-3)

ELEV 836 TDZE 831

REIL Rwy 8 and 26
MIRL Rwy 8-26