

WAAS  
CH **63138**  
**W13A**

APP CRS  
**136°**

Rwy ldg **3401**  
TDZE **754**  
Apt Elev **754**

**RNAV (GPS) RWY 13**

WASHINGTON MUNI (A WG)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).


▲ Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV DA to 1066 feet, LNAV/VNAV DA to 1282 feet; increase all MDAs 80 feet and visibility LNAV and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct KILKE and hold.

AWOS-3  
**127.825**

CHICAGO CENTER  
**135.6 370.95**

UNICOM  
**122.7 (CTAF) 0**

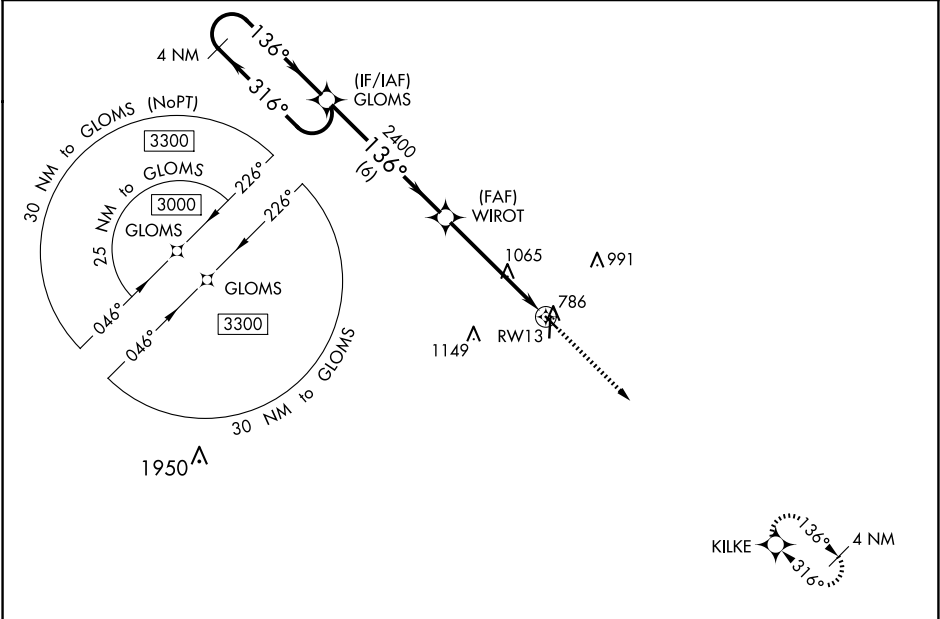

ELEV 754

TDZE 754

136° to RWY 13

81

36

4000 X 75

3401 X 60

51

4 NM Holding Pattern

GLOMS

3000

316°

136°

GP 3.00°

TCH 37°

WIROT

2400

\*LNAV only

\*1.7 NM to RWY 13

RWY 13

6 NM

3.4 NM

1.7 NM

| CATEGORY     | A       | B            | C                       | D  |
|--------------|---------|--------------|-------------------------|----|
| LPV DA       | 1004-1  | 250 (300-1)  |                         | NA |
| LNAV/VNAV DA | 1220-1½ | 466 (500-1½) |                         | NA |
| LNAV MDA     | 1320-1  | 566 (600-1)  | 1320-1½<br>566 (600-1½) | NA |
| CIRCLING     | 1320-1  | 566 (600-1)  | 1500-2¼<br>746 (800-2¼) | NA |

MIRL Rwy 13-31 and 18-36

REIL Rwy 13, 31, 18 and 36