

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>97628</b><br><b>W06A</b> | APP CRS<br><b>058°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5004</b><br><b>733</b><br><b>733</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 6

DAVIDSON COUNTY EXEC (E.XX)



⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Salisbury altimeter setting and increase all DA 37 feet and all MDA 40, increase LPV, LNAV/VNAV all Cats and LNAV Cat C visibility ½ mile. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MALSR

MISSED APPROACH:  
Climb to 3000 direct HACNI and hold.

|                          |                                            |                       |                                 |
|--------------------------|--------------------------------------------|-----------------------|---------------------------------|
| AWOS-3<br><b>119.825</b> | GREENSBORO APP CON<br><b>126.6 327.075</b> | GCO<br><b>135.075</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|--------------------------------------------|-----------------------|---------------------------------|

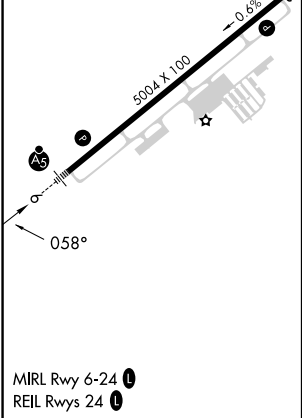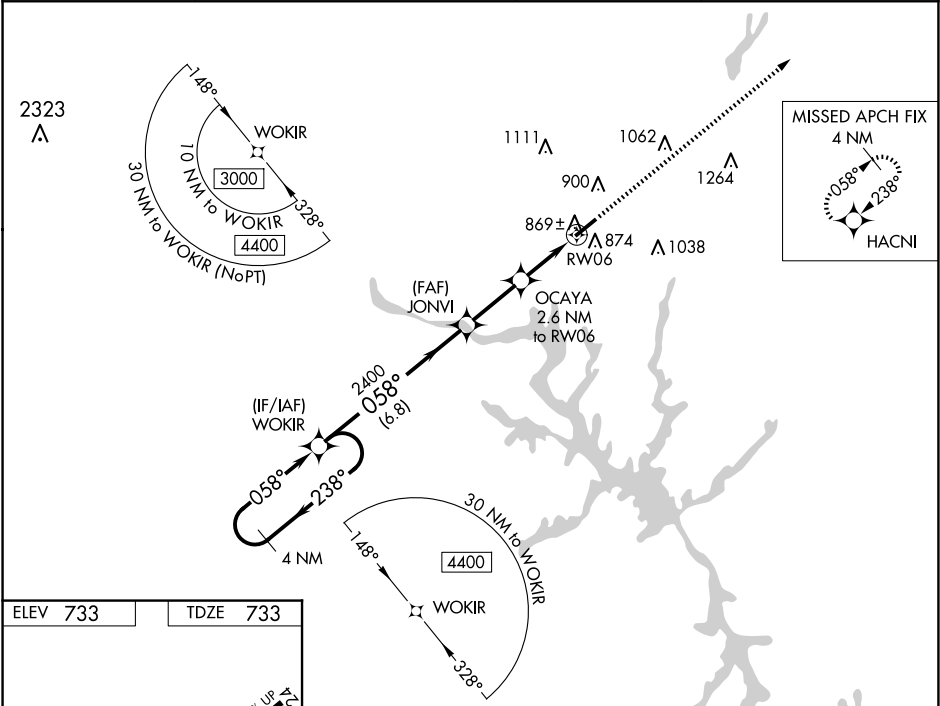

|                            |             |               |            |                                                                  |                |                 |
|----------------------------|-------------|---------------|------------|------------------------------------------------------------------|----------------|-----------------|
| 4 NM Holding Pattern WOKIR |             |               |            | VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 28). | 3000           | HACNI           |
|                            |             |               |            |                                                                  |                | *LNAV only      |
| GP 3.00° TCH 40            |             |               |            | 2400                                                             | 2.6 NM to RW06 | *0.8 NM to RW06 |
|                            |             |               |            | 1600                                                             |                |                 |
|                            |             |               |            | 6.8 NM                                                           | 2.5 NM         | 1.8 NM          |
| CATEGORY                   | A           | B             | C          | D                                                                |                |                 |
| LPV DA                     | 983-7/8     | 250 (300-7/8) |            |                                                                  | NA             |                 |
| LNAV/VNAV DA               | 1020-1      | 287 (300-1)   |            |                                                                  | NA             |                 |
| LNAV MDA                   | 1120-1      | 387 (400-1)   | 1120-1 1/8 | 387 (400-1 1/8)                                                  | NA             |                 |
| CIRCLING                   | 1220-1      | 1240-1        | 1340-1 3/4 | 607 (700-1 3/4)                                                  | NA             |                 |
|                            | 487 (500-1) | 507 (600-1)   |            |                                                                  |                |                 |