

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 54°C (130°F). Circling NA west of Rwy 1-19.

▲

Rwy 23 helicopter visibility reduction below ¾ SM NA.
DME/DME RNP-0.3 NA.

MISSED APPROACH: (Do not exceed 165K until ODKAE)
Climb to 5400 then climbing left turn to 9000 direct ODKAE and hold, continue climb-in-hold to 9000.

AWOS-3 119.025	ALBUQUERQUE CENTER 135.875 292.15	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

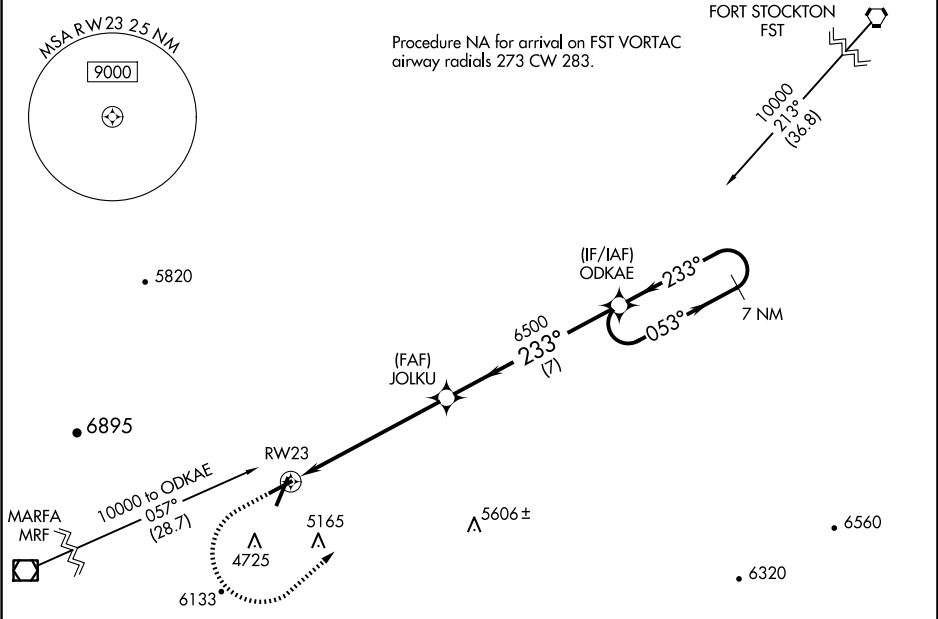

ELEV 4514

TDZE 4482

5400

9000

ODKAE

↑

↶

✳

*LNAV only.

RW23

JOLKU

ODKAE

2.8 NM

3.5 NM

7 NM

7 NM Holding Pattern

GP 3.00°
TCH 40

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2½)

5400-1¼

886 (900-1¼)

5460-1¼

946 (1000-1¼)

5760-3

1246 (1300-3)

5018 X 60

8002 X 75

1.2% UP

1.1% UP

233°

233°

053°

233°

8000

2.8 NM

3.5 NM

7 NM

5400-1¼

918 (900-1¼)

5400-2½

918 (900-2