

LOC/DME I-FQD	APP CRS	Rwy Idg	5000
109.55	009°	TDZE	1059
Chan 32(Y)		Apt Elev	1077



LOC RWY 1

RUTHERFORD COUNTY/MARCHMAN FLD (FQD)

VDP NA with Shelby-Cleveland County Rgnl altimeter setting. When local altimeter setting not received, use Shelby-Cleveland County Rgnl altimeter setting and increase all MDA 80 feet and S-1 Cat C and D and Circling Cat C visibilities $\frac{1}{8}$ mile; increase Circling Cat D visibility $\frac{1}{4}$ mile. DASCA fix minimums: Increase S-1 Cat C and D and Circling Cat C and D visibilities $\frac{1}{4}$ mile.

MISSED APPROACH: Climb to 1800 then climbing left turn to 3000 on heading 165° and on I-FQD localizer south course to EPOZI INT/I-FQD 12.8 DME and hold.

AWOS-3	GREER APP CON ★	UNICOM
118.275	119.4 350.2	122.8 (CTAF) 0

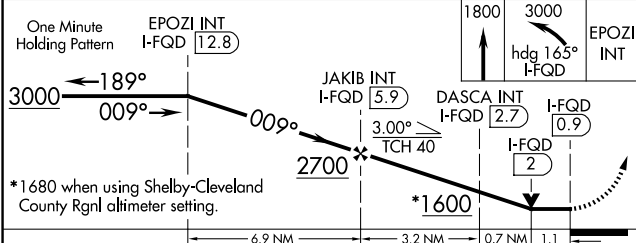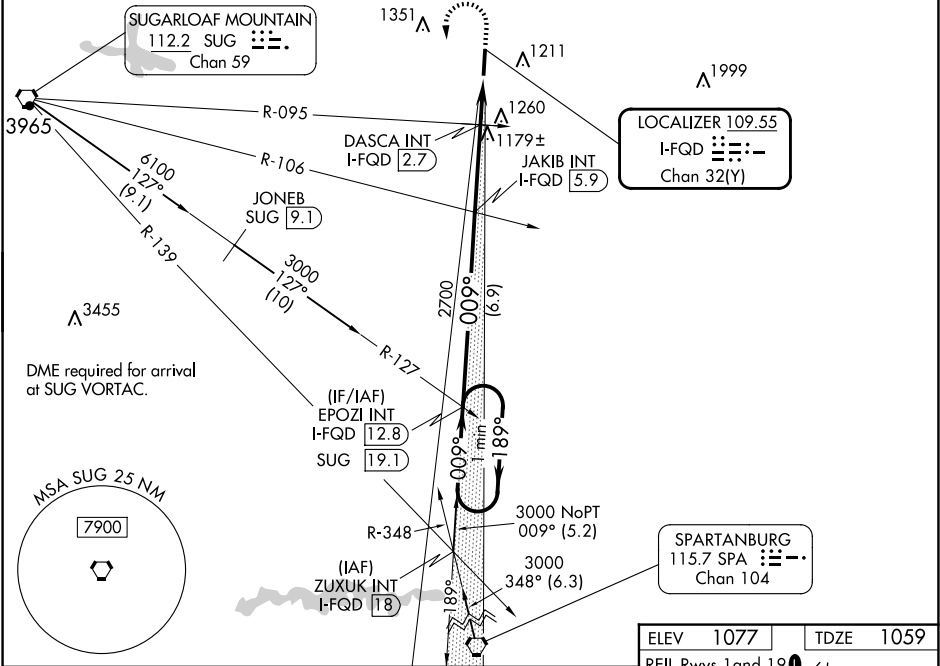

CATEGORY	A	B	C	D
S-1	1600-1 541 (600-1)		1600-1½ 541 (600-1½)	
CIRCLING	1600-1 523 (600-1)	1620-1 543 (600-1)	1640-1½ 563 (600-1½)	1820-2½ 743 (800-2½)
DASCA FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-1	1440-1 381 (400-1)		1440-1½ 381 (400-1½)	
CIRCLING	1560-1 483 (500-1)	1620-1 543 (600-1)	1640-1½ 563 (600-1½)	1820-1½ 743 (800-1½)

