WAAS CH 56433 W27A	APP CRS 273°	Rwy Ldg 4500 TDZE 858 Apt Elev 858

RNAV (GPS) RWY 27
KEWANEE MUNI (EZI)

RNP APCH - GPS.

T A NA Baro-VNAV NA. Use GBG altimeter setting; when not received use MLI altimeter setting and increase LPV DA to 1213 feet, LNAV/VNAV DA to 1242 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2500 direct WIKOK and hold.

QUAD CITY APP CON ★	UNICOM
133.275 257.8	122.8 (CTAF) L

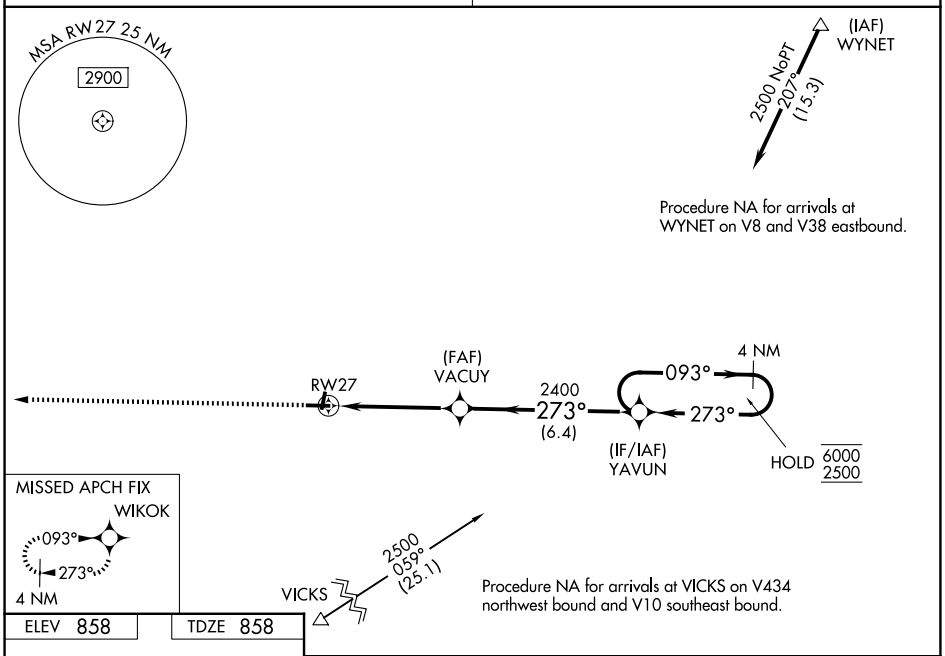

ELEV 858	TDZE 858

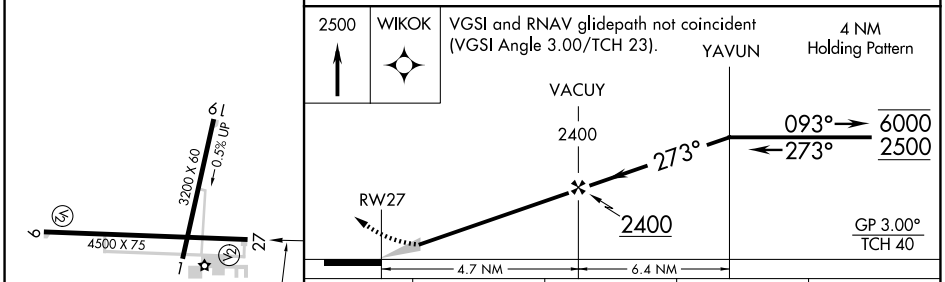

CATEGORY	A	B	C	D
LPV DA	1183-1 325 (400-1)			NA
LNAV/VNAV DA	1212-1 354 (400-1)			NA
LNAV MDA	1380-1 522 (600-1)		1380-1½ 522 (600-1½)	NA
CIRCLING	1380-1 522 (600-1)	1520-1 662 (700-1)	1520-1¾ 662 (700-1¾)	NA

MIRL Rwys 1-19 and 9-27 L

EC-3, 04 SEP 2025 to 02 OCT 2025

EC-3, 04 SEP 2025 to 02 OCT 2025