VOR/DME-A

RIPLEY (25M)

VORTAC HLI	APP CRS	Rwy Idg	N/A
112.4	094°	TDZE	N/A
Chan 71		Apt Elev	467

Use Corinth altimeter setting; when not received, use Tupelo altimeter setting and increase all MDAs 40 feet, and visibility Cat C ¼ SM. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing left turn to 3000 via heading 251° and HLI VORTAC R-094 to HLI VORTAC and hold.

CRX AWOS-3PT	MEMPHIS CENTER	UNICOM
118.675	135.9 260.6	122.8 (CTAF) L

Procedure NA for arrivals on HLI VORTAC airway radials 045 CW 112.

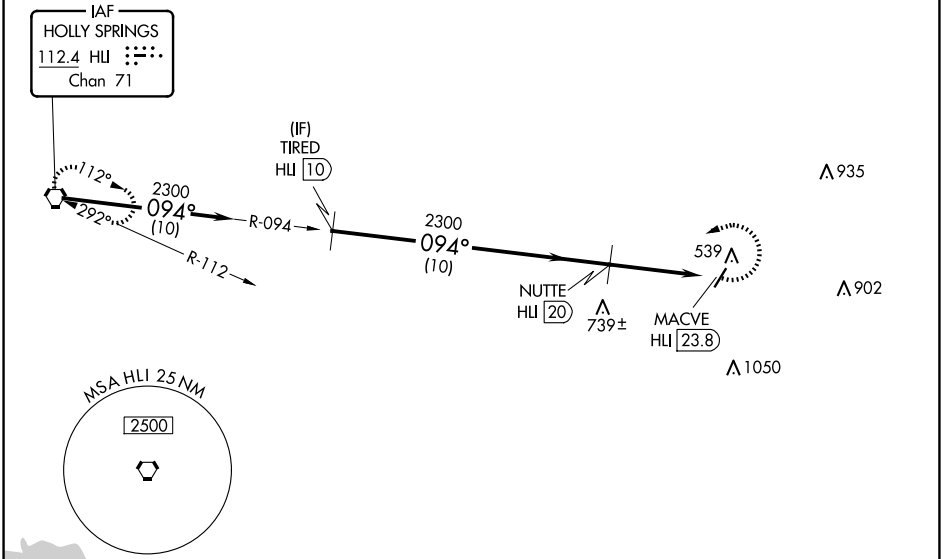

ELEV 467

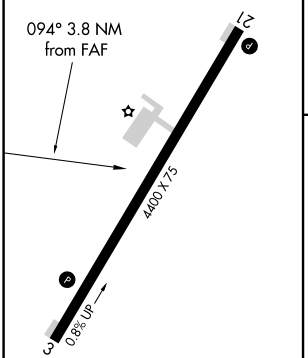

MIRL Rwy 3-21 L

1126

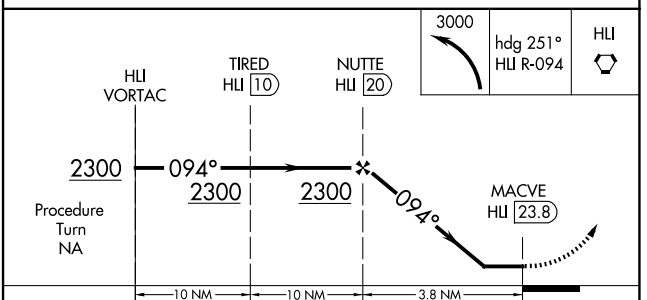

CATEGORY	A	B	C	D
CIRCLING	1060-1 593 (600-1)	1100-1¼ 633 (700-1¼)	1120-1¾ 653 (700-1¾)	1420-3 953 (1000-3)

SC-4, 04 SEP 2025 to 02 OCT 2025
SC-4, 04 SEP 2025 to 02 OCT 2025