



WAAS CH 99627 W24A	APP CRS 239°	Rwy Idg TDZE 425 Apt Elev 428
--	------------------------	---

RNAV (GPS) RWY 24

MUHLenberg COUNTY (M21)

RNP APCH - GPS.	When local altimeter setting not received, use Owensboro altimeter setting and increase all MDAs 80 feet. Increase LP Cats C/D visibility ¾ SM and LNAV Cats C/D and Circling Cats C/D visibility ¼ SM. Procedure NA at night. Rwy 24, helicopter visibility reduction below 1 SM NA.	MISSED APPROACH: Climb to 3000 direct JEPAX and hold.
-----------------	---	--

AWOS-3 120.45	CAMPBELL APP CON ★ 118.1 269.525	UNICOM 123.0 (CTAF) 0
-------------------------	--	---------------------------------

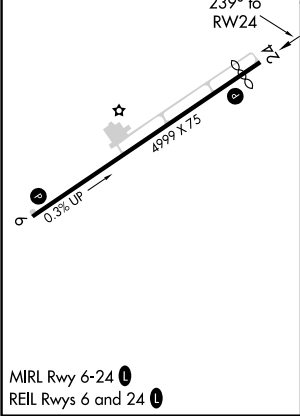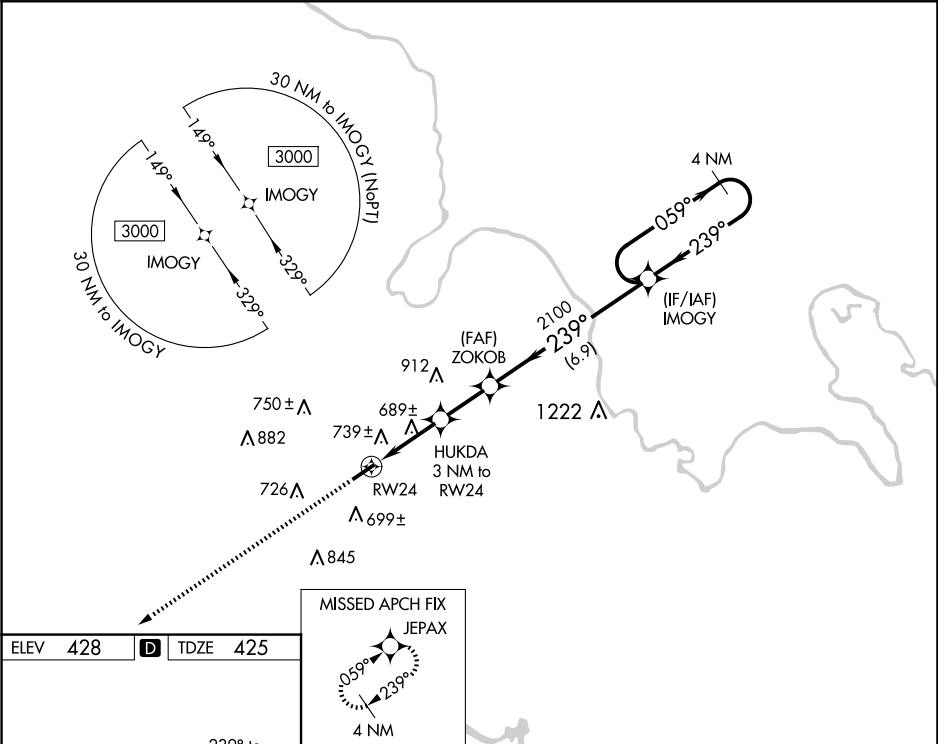

MISSED APCH FIX JEPAX				
Visual Segment - Obstacles.				
3000 JEPAX 4 NM				
HUKDA 3 NM to RW24 ZOKOB IMOGY 4 NM Holding Pattern				
RW24 1420 2100 059°→ 3000 ← 239°				
3 NM 2.1 NM 6.9 NM				
CATEGORY	A	B	C	D
LP MDA	940-1	515 (600-1)	940-1⅓	515 (600-1⅓)
LNAV MDA	1000-1	575 (600-1)	1000-1⅝	575 (600-1⅝)
CIRCLING	1040-1 612 (700-1)	1100-1 672 (700-1)	1180-2¼ 752 (800-2¼)	1200-2½ 772 (800-2½)