


WAAS CH 99536 W15A	APP CRS 151°	Rwy Idg 4000 TDZE 198 Apt Elev 198
--	------------------------	---

RNAV (GPS) RWY 15
BELFAST MUNI (BST)



T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. When local altimeter not received, use Bangor Intl altimeter setting and increase all DA/MDA 60 feet. Increase LPV all Cats visibility ½ mile; increase LNAV/VNAV all Cats visibility ¾ mile; increase LNAV and Circling Cat C visibility ¼ mile. Baro-VNAV NA when using Bangor Intl altimeter. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct ACYOG and hold.

AWOS-AV 122.975	BANGOR APP CON 118.925 239.3	UNICOM 122.975 (CTAF) 0
---------------------------	--	-----------------------------------

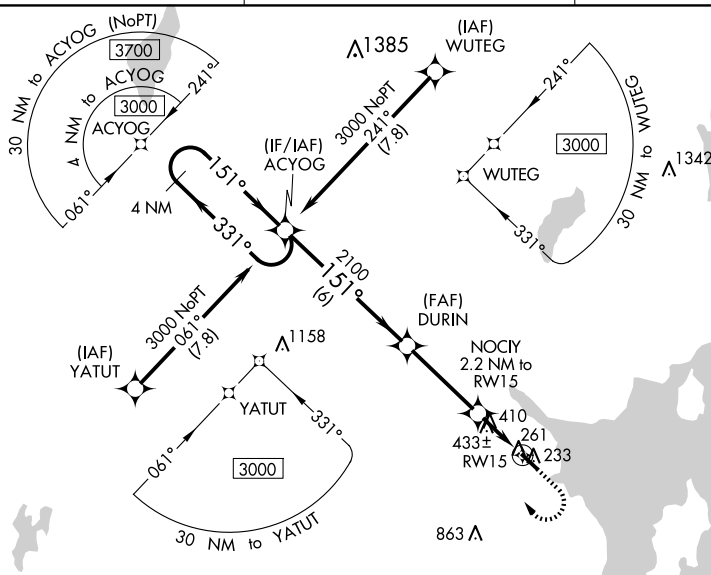

ELEV	198		TDZE	198
------	-----	--	------	-----

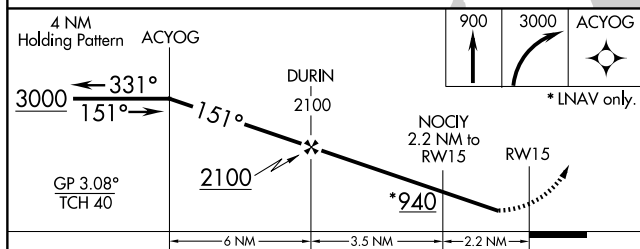

CATEGORY	A	B	C	D
LPV DA	487-1	289 (300-1)		NA
LNAV/ VNAV	748-1 $\frac{7}{8}$	550 (600-1 $\frac{7}{8}$)		NA
LNAV MDA	720-1	522 (600-1)	720-1 $\frac{1}{2}$ 522 (600-1 $\frac{1}{2}$)	NA
 CIRCLING	720-1 522 (600-1)	800-1 602 (700-1)	1040-2 $\frac{1}{2}$ 842 (900-2 $\frac{1}{2}$)	NA

MIRL Rwy 15-33 **L**
REIL Rwy 15 and 33 **L**