




LOC I-MQJ 108.7	APP CRS 252°	Rwy Idg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 25

INDIANAPOLIS RGNL (MQJ)

▼ ▲ NA When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility ½ mile and Circling Cat D visibility ¼ mile.	MALSR AS	MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.
--	--	--

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF) 0
----------------------------	---	---------------------------	--

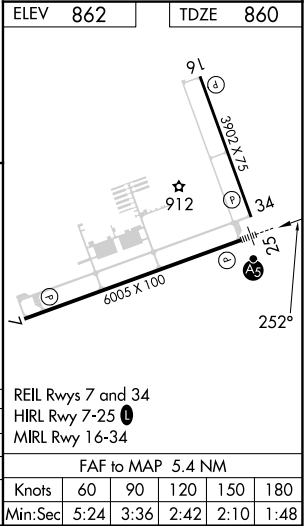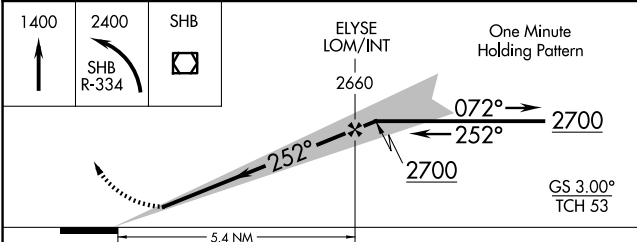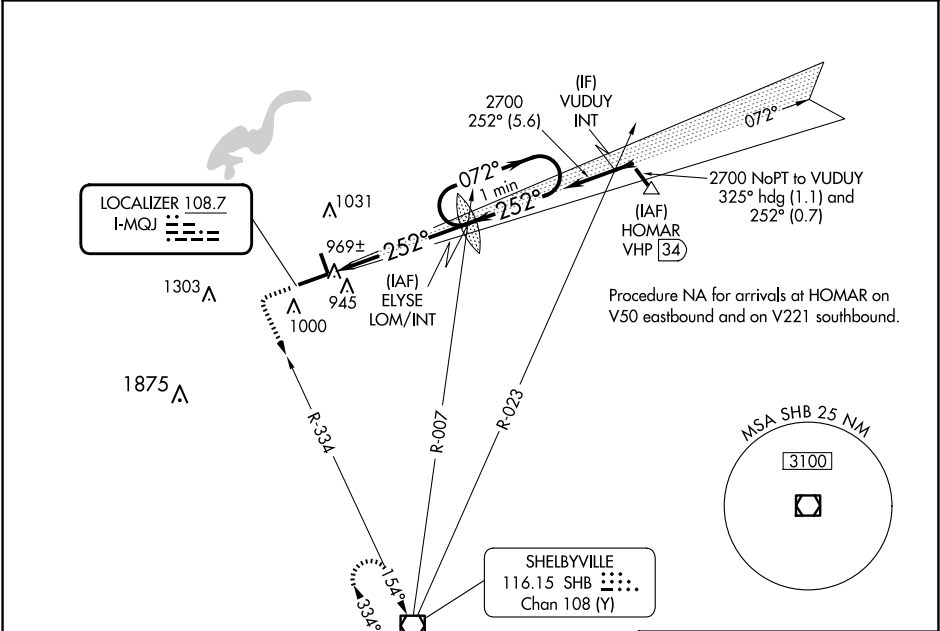

CATEGORY	A	B	C	D	HIRL Rwy 7-25 0 MIRL Rwy 16-34							
S-ILS 25	1060-½ 200 (200-½)											
S-LOC 25	1220-½ 360 (400-½)		1220-⅝ 360 (400-⅝)		FAF to MAP 5.4 NM							
CIRCLING	1340-1 478 (500-1)		1360-1½ 498 (500-1½)		1660-2½ 798 (800-2½)		Knots	60	90	120	150	180
							Min:Sec	5:24	3:36	2:42	2:10	1:48