


WAAS CH 56429 W14A	APP CRS 135°	Rwy Idg 5006 TDZE 678 Apt Elev 678
--	------------------------	---

RNAV (GPS) RWY 14
CHEROKEE COUNTY (JSO)

Baro-VNAV NA when using Nacogdoches altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Nacogdoches altimeter setting and increase all DA to 1046 feet and increase LPV visibility ½ SM and LNAV/VNAV visibility ¼ SM; increase all MDA 120 feet and LNAV visibility Cat C ¾ SM, Circling visibility Cat C ¼ SM. DME/DME RNP-0.3 NA. VDP NA with Nacogdoches altimeter setting.

MISSED APPROACH:
Climb to 3100 direct
NOPCI and hold.

AWOS-3 119.075	LONGVIEW APP CON* 128.75 379.15	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

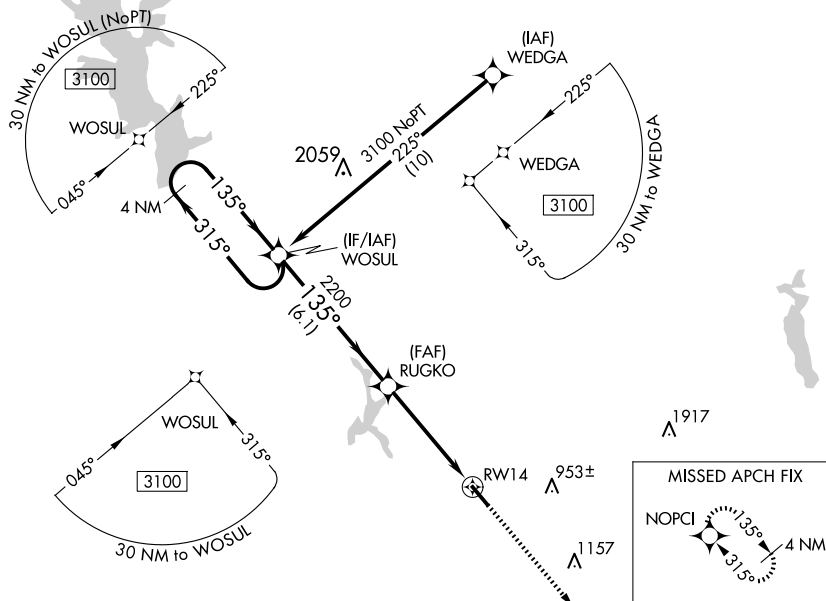

4 NM Holding Pattern

WOSUL

3100 ← 315°
135° →

135°

2200

RUGKO

2200

*1.2 NM to RW14

RW14

GP 3.00°
TCH 30

6.1 NM

3.5 NM

1.2 NM

3100

NOPCI

*LNAV only

CATEGORY	A	B	C	D
LPV DA	928-1 250 (300-1)			NA
RNAV/ VNAV DA	928-1 250 (300-1)			NA
RNAV MDA	1080-1	402 (500-1)	1080-1 $\frac{1}{8}$ 402 (500-1 $\frac{1}{8}$)	NA
CIRCLING	1080-1 402 (500-1)	1140-1 462 (500-1)	1280-1 $\frac{3}{4}$ 602 (700-1 $\frac{3}{4}$)	NA

