

WAAS CH 56248 W17A	APP CRS 173°	Rwy Idg TDZE 889 Apt Elev 892	5799
--	------------------------	---	-------------



RNAV (GPS) RWY 17
WILLIAM R POGUE MUNI (OWP)

RNP APCH - GPS.

⚠ Rwy 17 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat C east of Rwy 17-35.
⚠ When local altimeter setting not received, use TUL altimeter setting and increase LPV DA to 1206 feet and all visibilities $\frac{1}{2}$ SM; increase LNAV/VNAV DA to 1443 feet and all visibilities $\frac{1}{4}$ SM; increase all MDAs 80 feet and LNAV visibility Cat C $\frac{1}{4}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using TUL altimeter setting.

MISSED APPROACH:
Climb to 2800 direct ACERT and hold.

AWOS-3T 118.325	TULSA APP CON 124.0 338.3	UNICOM 122.7 (CTAF)
---------------------------	-------------------------------------	-------------------------------

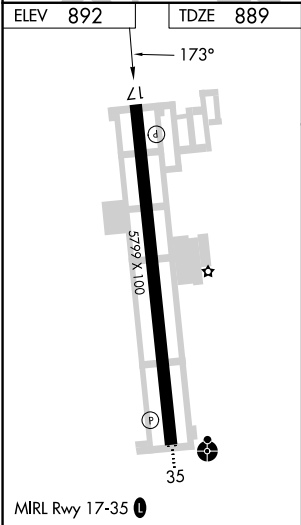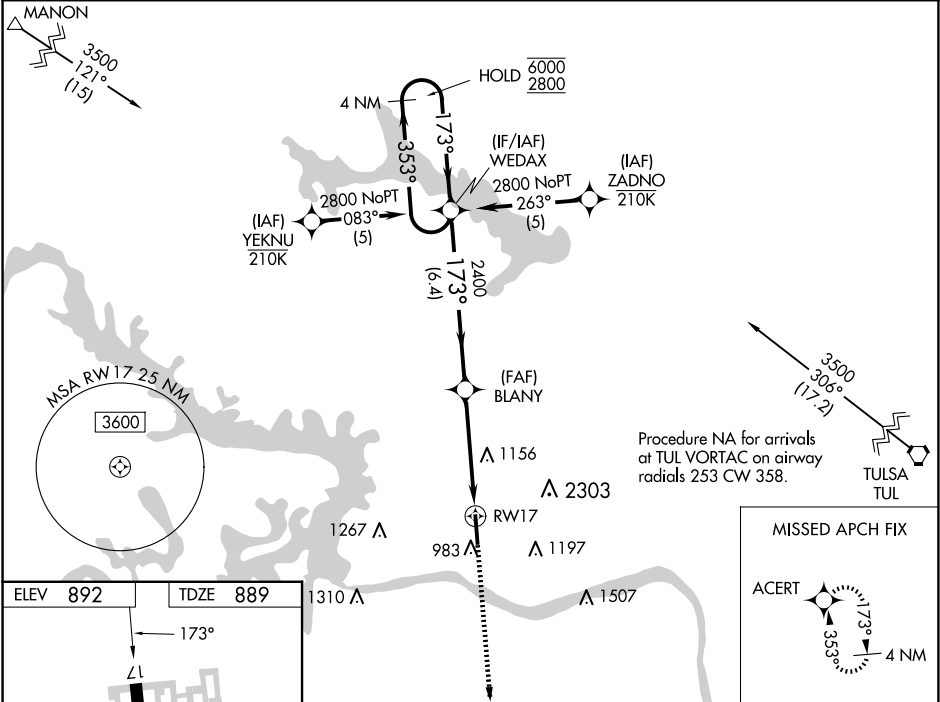

4 NM Holding Pattern WEDAX				VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 31).		2800	ACERT
6000 ← 353°				173° →		2400	1.7 NM to RWY17
GP 3.00° TCH 45				2400		2400	RWY17
				6.4 NM		2.9 NM	1.7 NM
CATEGORY	A	B	C	D			
LPV DA	1139- $\frac{3}{4}$			250 (300- $\frac{3}{4}$)	NA		
LNAV/VNAV DA	1376-1 $\frac{3}{8}$			487 (500-1 $\frac{3}{8}$)	NA		
LNAV MDA	1460-1	571 (600-1)	1460-1 $\frac{5}{8}$	571 (600-1 $\frac{5}{8}$)	NA		
CIRCLING	1460-1	568 (600-1)	1460-1 $\frac{5}{8}$	568 (600-1 $\frac{5}{8}$)	NA		