

WAAS CH 57912 W35A	APP CRS 353°	Rwy Idg 5799 TDZE 892 Apt Elev 892
--	------------------------	---

RNAV (GPS) RWY 35

WILLIAM R POGUE MUNI (OWP)

RNP APCH - GPS.

▼ Rwy 35 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling NA for Cat C east of Rwy 17-35.

▲ Inop tabs does not apply to LPV all Coats. When local altimeter setting not received, use TUL altimeter setting and increase LPV DA to 1209 feet, increase LNAV/VNAV DA to 1244 feet and all visibilities $\frac{1}{8}$ SM. Increase all MDAs 80 feet and LNAV visibility Cat C $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using TUL altimeter setting.

ODALS



MISSED APPROACH:
Climb to 2800 direct
WEDAX and hold.

AWOS-3T 118.325	TULSA APP CON 124.0 338.3	UNICOM 122.7 (CTAF)0
---------------------------	-------------------------------------	--------------------------------

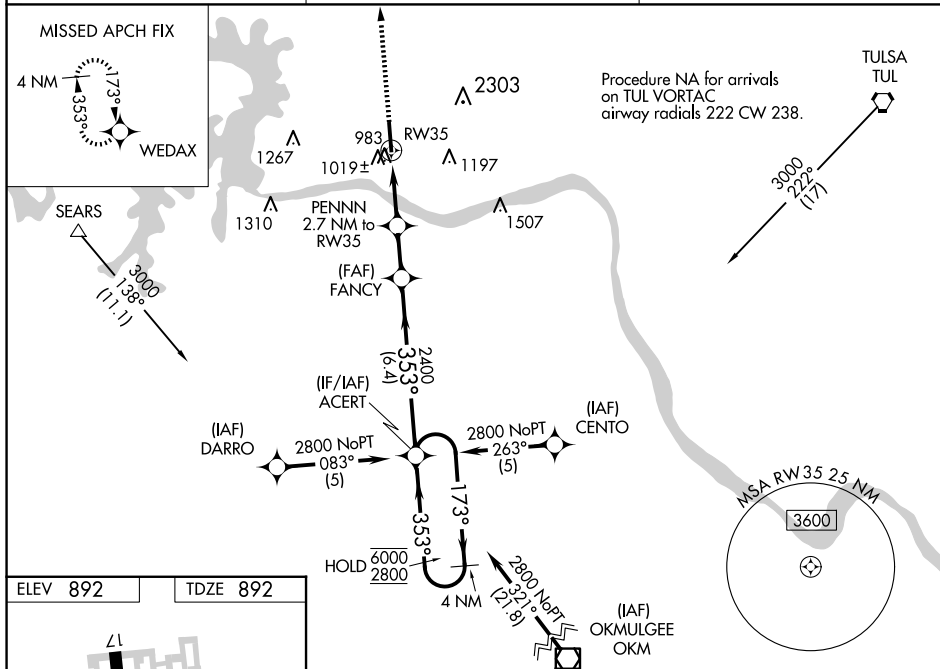


Diagram illustrating the RW35 to RW355 RNAV route. The route is defined by the following segments and distances:

- Segment 1: RW35 to 1.1 NM to R35 (1.1 NM)
- Segment 2: 1.6 NM to RW35 (1.6 NM)
- Segment 3: 1.9 NM to RW35 (1.9 NM)
- Segment 4: 6.4 NM to RW35 (6.4 NM)
- Segment 5: 173° to RW355 (173°)

The diagram also shows the VGS and RNAV glidepath not coincident (VGS Angle 3.00°/TCH 33). The route is labeled with various navigation aids and distances.