

WAAS CH 61119 W35A	APP CRS 354°	Rwy Idg TDZE Apt Elev	3501 1026 1030
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

BLACKWELL-TONKAWA MUNI (BKN)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Ponca City altimeter setting and increase all DA 31 feet and all MDA 40 feet and LNAV/VNAV all Cats visibility ¼ mile. Baro-VNAV and VDP NA when using Ponca City altimeter setting.

MISSED APPROACH: Climb to 2800 direct EWAIT and hold.

AWOS-3PT 120.575	KANSAS CITY CENTER 127.8 319.1	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

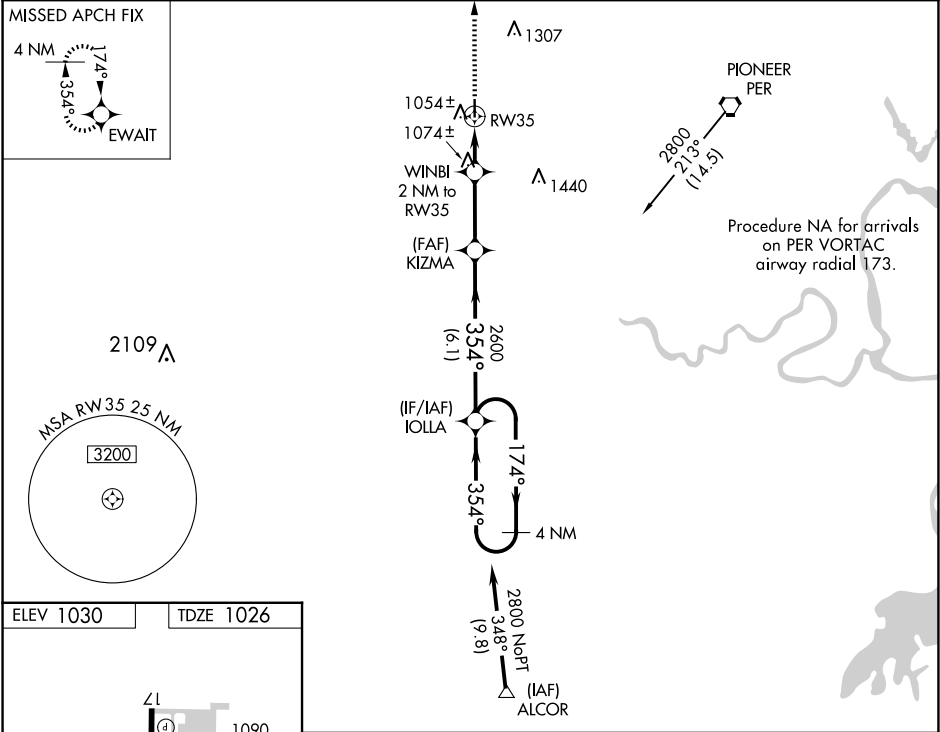

ELEV 1030

TDZE 1026

3501 X 60

3501

35

354° to RW35

MIRL Rwy 17-35

2800

EWAIT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

WINBI

2 NM to RW35

KIZMA

2600

IOLLA

4 NM Holding Pattern

174°

354°

2800

GP 3.00° TCH 40

1680*

2600

354°

1 NM

1 NM

2.8 NM

6.1 NM

*LNAV only

*1 NM to RW35

CATEGORY	A	B	C	D
LPV DA	1276-1	250 (300-1)		NA
LNAV/VNAV DA	1324-1	298 (300-1)		NA
LNAV MDA	1340-1	314 (400-1)		NA