

WAAS CH 99719 W16A	APP CRS 164°	Rwy Idg 6000 TDZE 99 Apt Elev 100
--	------------------------	--

RNAV (GPS) RWY 16

RNP APCH.

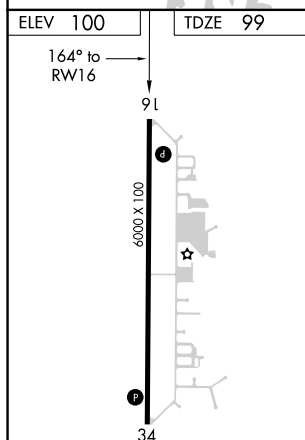
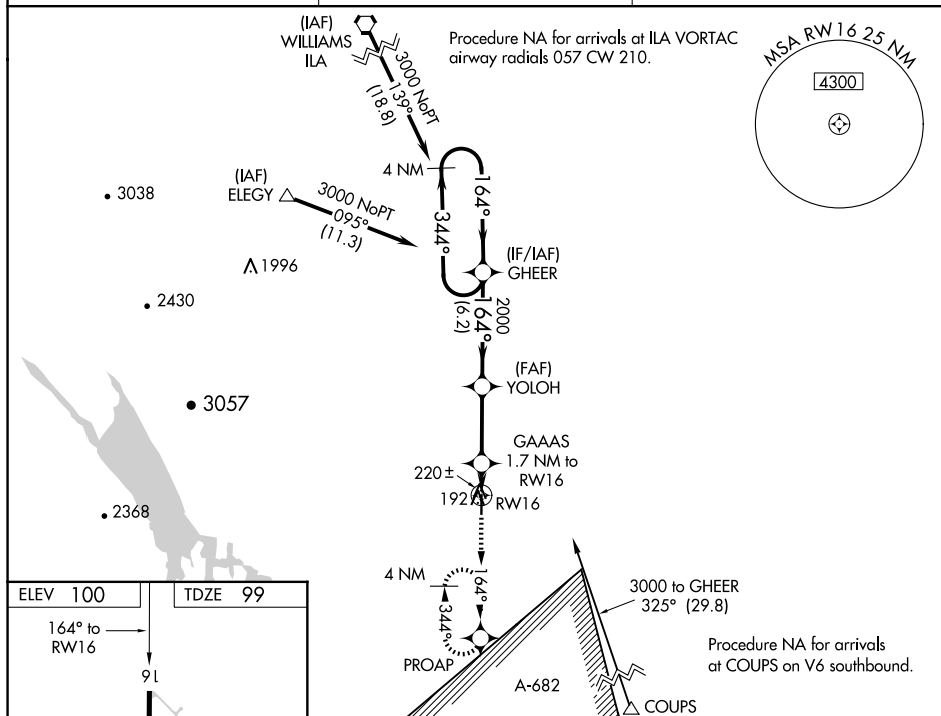
NA When local altimeter setting not received, use Travis AFB altimeter setting and increase all DA 50 feet and all MDA 60 feet, and increase LNAV/VNAV all Cats and LNAV Cat C and D visibility $\frac{1}{4}$ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). Baro-VNAV NA when using Travis AFB altimeter setting.

MISSED APPROACH: Climb to 3600 direct PROAP and hold, continue climb-in-hold to 3600.

AWOS-3P
125.775

TRAVIS APP CON
126.6 281.45

UNICOM
123.0 (CTAF) **L**

MIRL Rwy 16-34 **L**

DAVIS/WOODLAND/WINTERS, CALIFORNIA

Amdt 2C 15AUG19

38°35'N-121°51'W

YOLO COUNTY (DWA)

RNAV (GPS) RWY 16

SW-2, 04 SEP 2025 to 02 OCT 2025

3600 ↑	PROAP ✦				
*LNAV only		GAAAS 1.7 NM to RW16	YOLOH 2000	GHEER	4 NM Holding Pattern
		RW16	680*	2000	3000
		1.7 NM	4.2 NM	6.2 NM	GP 3.00° TCH 40
CATEGORY		A	B	C	D
LPV DA		360-1	261 (300-1)		
LNAV/ VNAV DA		402-1	303 (400-1)		
LNAV MDA		480-1	381 (400-1)	480-1½	381 (400-1½)