


WAAS CH 45520 W33A	APP CRS 326°	Rwy Idg 3999 TDZE 984 Apt Elev 984
--	------------------------	---


RNAV (GPS) RWY 33
BRENNER FLD (FNB)

RNP APCH - GPS	MISSED APPROACH: Climb to 3000 direct COVUT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV NA when using AFK altimeter setting. When local altimeter not received, use AFK altimeter setting and increase LPV DA to 1338 and LNAV/VNAV DA to 1380, increase all MDAs 120 feet.	

ASOS 119.275	ST JOSEPH APP CON ★ 120.35 360.8	UNICOM 122.8 (CTAF) 1
------------------------	--	---------------------------------

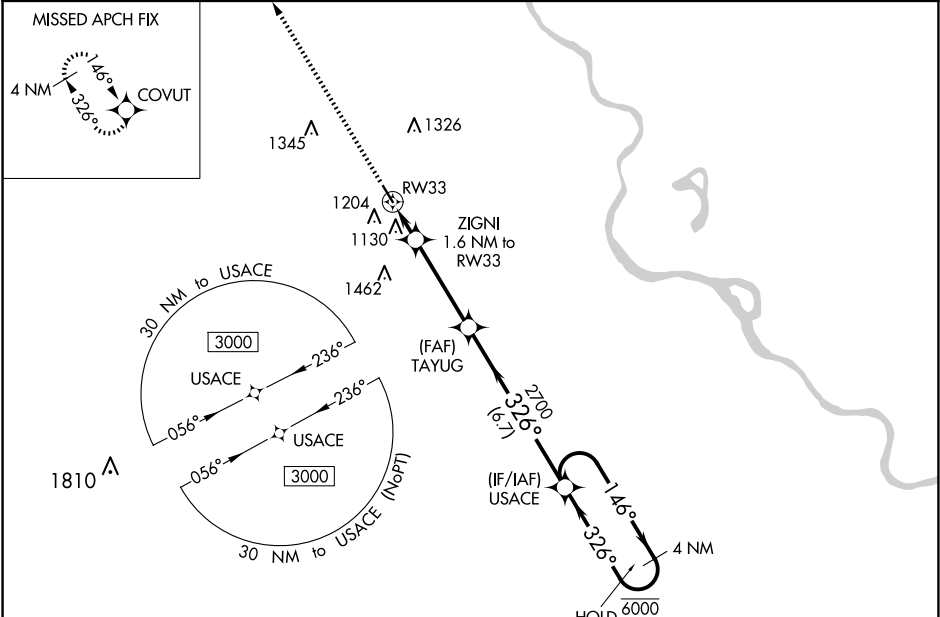

ELEV 984	TDZE 984
MIRL Rwy 15-33 1	
REIL Rwy 15 and 33 1	

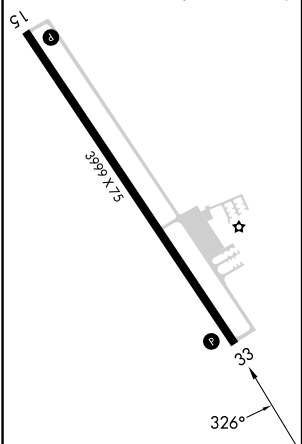

3000	COVUT	TAYUG	USACE	4 NM Holding Pattern
↑	✦	2700	146° → 6000 ← 326° 3000	
		ZIGNI 1.6 NM to RW33	326°	GP 3.00° TCH 40
		RW33	1520	
		1.6	3.7 NM	6.7 NM
CATEGORY	A	B	C	D
LPV DA	1234-1	250 (300-1)	NA	
LNAV/VNAV DA	1276-1	292 (300-1)	NA	
LNAV MDA	1380-1	396 (400-1)	NA	
CIRCLING	1560-1	576 (600-1)	NA	

NC-2, 04 SEP 2025 to 02 OCT 2025

NC-2, 04 SEP 2025 to 02 OCT 2025