

WAAS
CH **70434**
W33A

APP CRS
334°

Rwy Idg
TDZE
Apt Elev

4200
1379
1379

RNAV (GPS) RWY 33

EL DORADO/CAPT JACK THOMAS MEML (EQA)

▼

NA

RNP APCH-GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH: Climb to 3100 direct GOPHR and hold.

AWOS-3P
120.875

WICHITA APP CON
134.8 269.1

UNICOM
122.8 (CTAF)

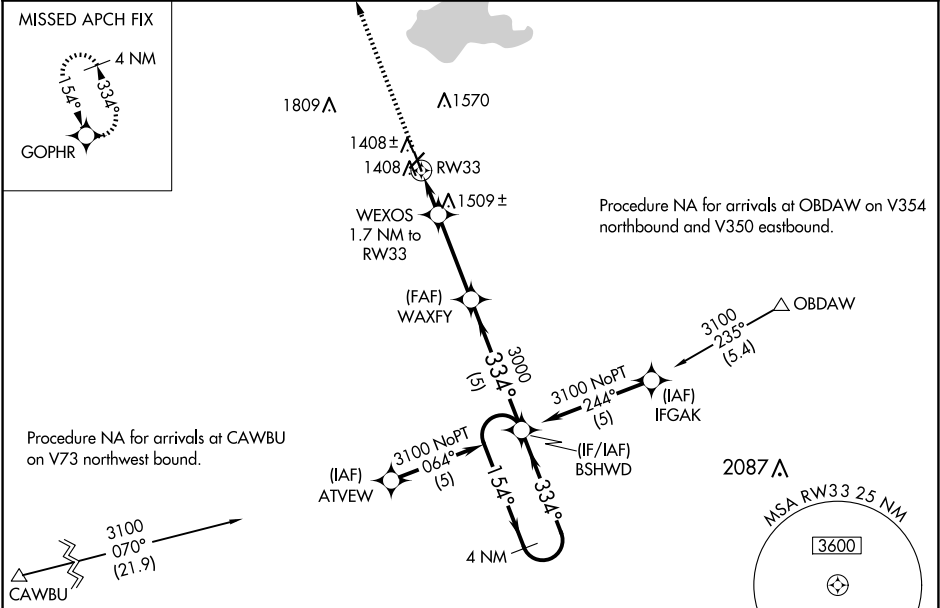

ELEV **1379**

TDZE **1379**

3100

GOPHR

WEXOS
1.7 NM to RW33

WAXFY
3000

BSHWD
4 NM Holding Pattern

154°

334°

3100

GP 3.00°
TCH 40

*1.1 NM to RW33

*1.1 NM to RW33

1960*

3.3 NM

5 NM

CATEGORY	A	B	C	D
LPV DA	1579-1	200 (200-1)	NA	
LNAV/VNAV DA	1629-1	250 (300-1)	NA	
LNAV MDA	1760-1	381 (400-1)	NA	
CIRCLING	1820-1 441 (500-1)	1960-1 581 (600-1)	NA	