

LOC I-RGK	APP CRS	Rwy Idg	5010
110.1	091°	TDZE	778
		Apt Elev	778

ILS or LOC RWY 9


RED WING RGNL (RGK)

ADF Required. When local alimeter setting not received, use South St. Paul alimeter setting; increase S-ILS 9 DA to 1050 feet; increase all MDA 80 feet and visibility S-LOC 9 Cat C/D 1/8 SM and Circling Cat B/C 1/4 SM. For inop MALS, increase S-LOC 9 Cat C/D visibility 1/4 mile. For inop MALS, when using South St. Paul alimeter setting, increase S-ILS 9 all Cats visibility 3/8 mile, and S-LOC 9 Cat C/D visibility 3/4 mile.

MALS

MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct REGUE LOM and hold.

AWOS-3	MINNEAPOLIS APP CON	UNICOM
119.25	121.2 335.65	123.05 (CTAF) 0

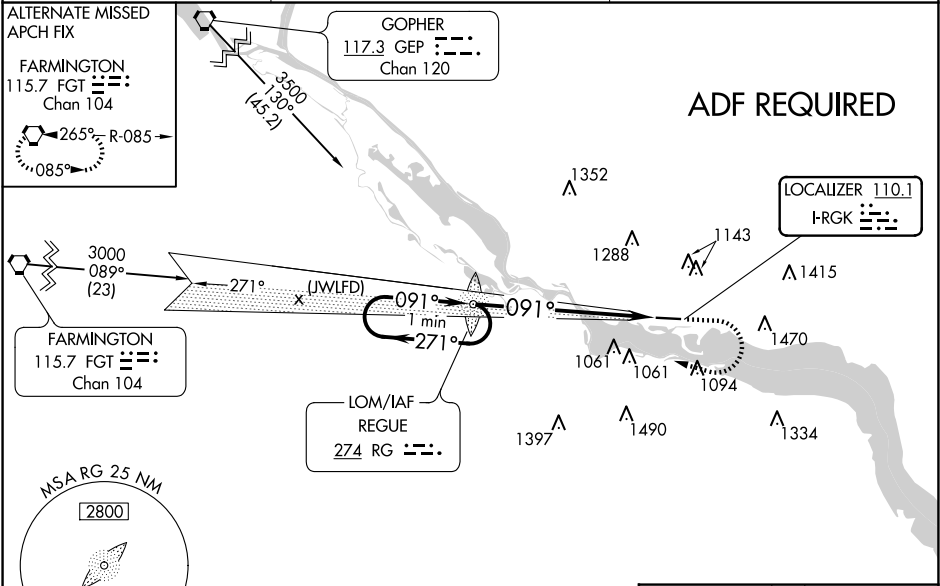

One Minute Holding Pattern

REGUE RG LOM

2000 3000 RG

3000

271°

091°

3000

GS 3.00° TCH 50

6.6 NM

ELEV 778 TDZE 778

091° 6.6 NM from FAF

5010 X 100

CATEGORY	A	B	C	D
S-ILS 9	978-1/2 200 (200-1/2)			
S-LOC 9	1520-1/2 742 (800-1/2)	1520-3/4 742 (800-3/4)	1520-13/4 742 (800-13/4)	
CIRCLING	1520-1 742 (800-1)		1640-21/2 862 (900-21/2)	1780-3 1002 (1100-3)

HIRL Rwy 9-27 0

FAF to MAP 6.6 NM

Knots	60	90	120	150	180
Min:Sec	6:36	4:24	3:18	2:38	2:12