

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 4000 direct CEGNU and hold, continue climb-in-hold to 4000.

AWOS-3 120.825	WATERLOO APP CON ★ 118.9 251.15	UNICOM 122.8 (CTAF) 0
--------------------------	---	--

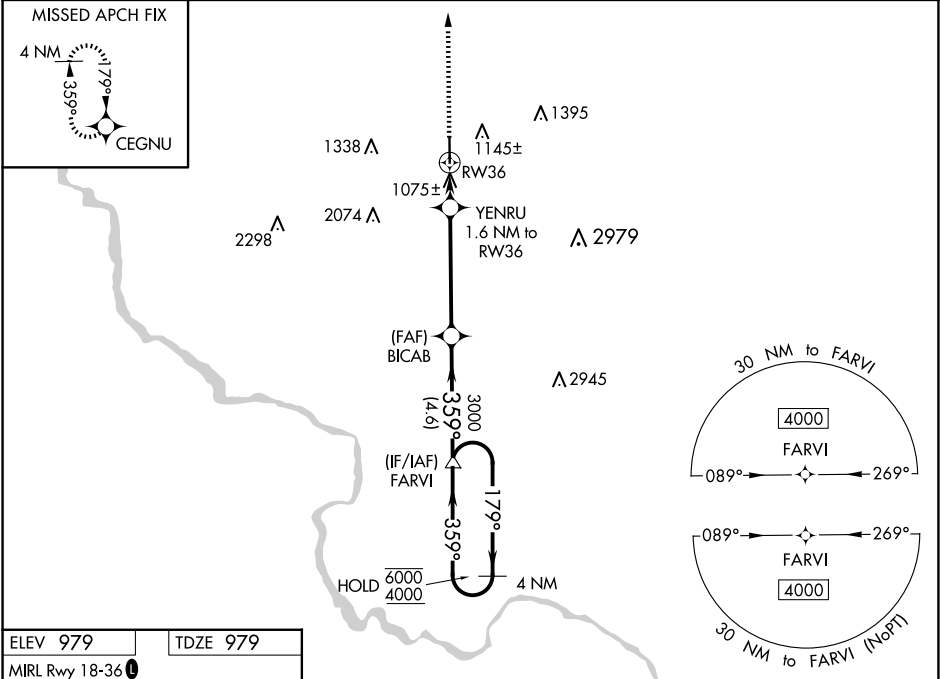

ELEV 979

TDZE 979

MIRL Rwy 18-36 **0**

REIL Rwys 18 and 36 **0**

81

5500 X 100

36

359°

4000

CEGNU

YENRU 1.6 NM to RW36

BICAB

FARVI

4 NM Holding Pattern

*LNAV only

*1 NM to RW36

RW36

179°

359°

3000

6000

4000

GP 3.00°

TCH 40

1 NM

0.6

4.6 NM

4.6 NM

CATEGORY	A	B	C	D
LPV DA	1229-3/4 250 (300-3/4)			
LNAV/VNAV DA	1236-7/8 257 (300-7/8)			
LNAV MDA	1340-1 361 (400-1)			
C CIRCLING	1500-1	521 (600-1)	1700-2 721 (800-2)	2440-3 1461 (1500-3)