



WAAS CH 97707 W12A	APP CRS 119°	Rwy Idg TDZE Apt Elev	5500 2431 2432
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

CALDWELL EXEC (EUL)

RNP APCH-GPS.		
▼ Procedure NA at night. Rwy 12 helicopter visibility reduction below 1 SM NA. ▲ Baro-VNAV NA when using Boise altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 44°C. When local altimeter setting not received, use Boise altimeter setting and increase all DA/MDA 120 feet and all visibilities ½ mile.		MISSED APPROACH: Climb to 5000 direct ADEXE and hold.

AWOS-3PT 135.075	BIG SKY APP CON 119.6 269.4	UNICOM 123.0 (CTAF) 0
----------------------------	---------------------------------------	---------------------------------

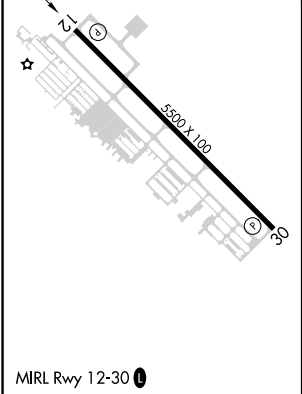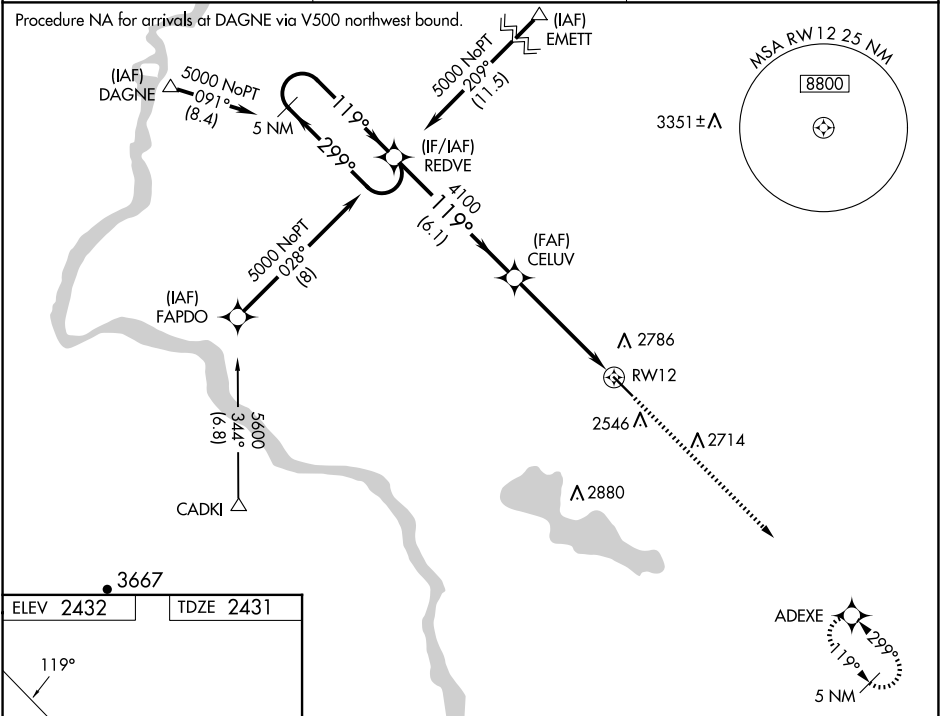

5 NM Holding Pattern		REDVE	CELUV	5000	ADEXE
5000		299°	119°	119°	
GP 3.00° TCH 42			4100		
		6.1 NM	5.1 NM		
CATEGORY	A	B	C	D	
LPV DA	2700-1 269 (300-1)				
LNAV/VNAV DA	2994-2 563 (600-2)				
LNAV MDA	2840-1	409 (500-1)	2840-1¼	409 (500-1¼)	