

WAAS CH 86301 W17A	APP CRS 169°	Rwy Idg TDZE 1665 Apt Elev 1670
--	------------------------	---


RNAV (GPS) RWY 17

YORK MUNI (JYR)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV and LNAV/VNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.

MISSED APPROACH:
Climb to 4000 direct WIVFO and hold.

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) Ⓛ
--------------------------	--	---------------------------------

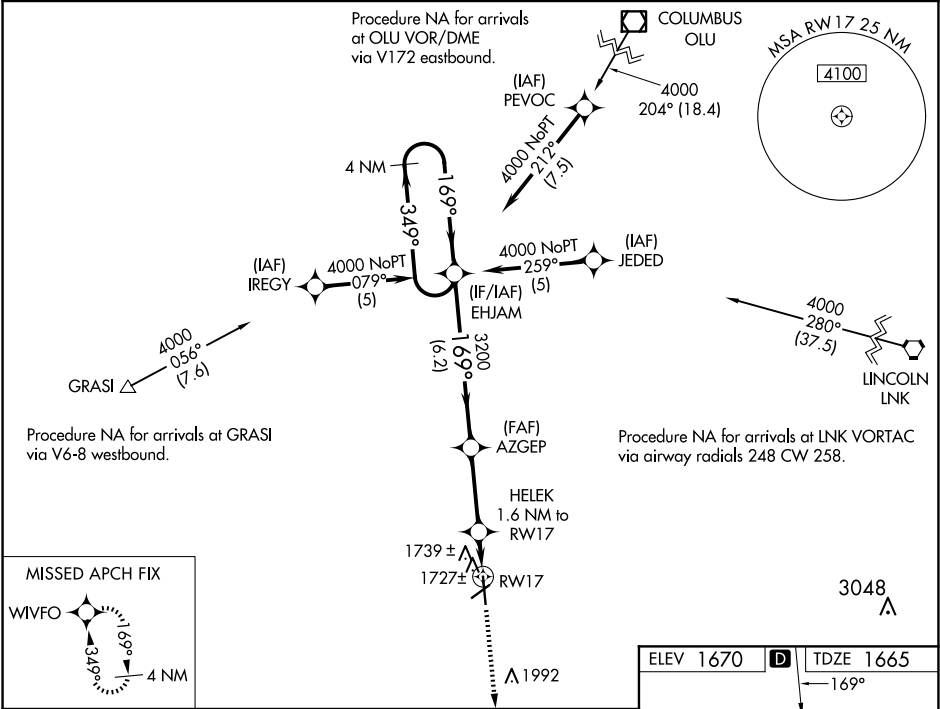

4 NM Holding Pattern		EHJAM	AZGEP	HELEK 1.6 NM to RW17	4000	WIVFO
GP 3.00° TCH 44		3200	*2220	*0.9 NM to RW17	*LNAV only.	
		6.2 NM	3 NM	0.7 NM	0.9 NM	
CATEGORY	A	B	C	D		
LPV DA	1915-3/4 250 (300-3/4)				NA	
LNAV/ VNAV DA	2031-1 1/4 366 (400-1 1/4)				NA	
LNAV MDA	2000-1 335 (400-1)				NA	
CIRCLING	2060-1 390 (400-1)	2180-1 510 (600-1)	2200-1 1/2 530 (600-1 1/2)			NA

