


WAAS CH 77905 W23A	APP CRS 234°	Rwy Idg TDZE Apt Elev	7300 7143 7143
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23

EVANSTON-UINTA COUNTY BURNS FLD (E V W)

RNP APCH - GPS. ⚠ For inoperative MALSRL, increase LPV all Cats visibility to 1, LNAV/VNAV Cat D to 1 and LNAV Cat D to 1¼. When local altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -29°C or above 34°C.	MALSRL 	MISSED APPROACH: Climb to 12000 direct SOLNE and via 212° track to COOLI and hold, continue climb-in-hold to 12000.
--	------------	---

ASOS 120.0	SALT LAKE CENTER 127.7 354.125	GCO 121.72	UNICOM 123.0 (CTAF)
----------------------	--	----------------------	-------------------------------

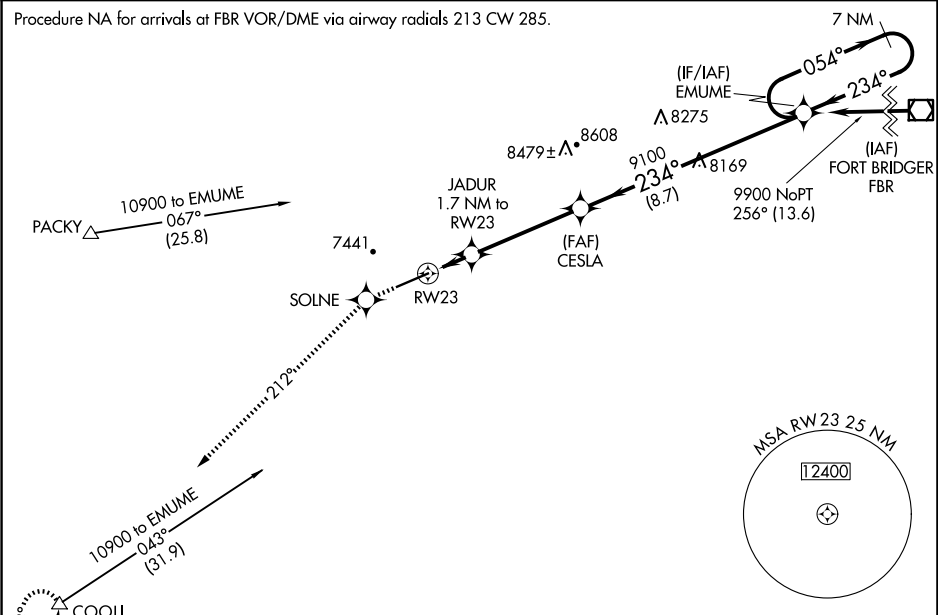

ELEV 7143

TDZE 7143

12000	SOLNE	212° tr	COOLI	
*LNAV only				
JADUR 1.7 NM to RW23				
*1.1 NM to RW23				
RW23				
7700*				
GP 3.00' TCH 47				
7300 X 100				
7200				
234°				
7 NM Holding Pattern				
9900				
9100				
234°				
054°				
7 NM				
EMUME				
CESLA				
9195				
7 NM				
COOLI				
212° tr				
SOLNE				
12000				

CATEGORY	A	B	C	D
LPV DA	7393-1/2 250 (300-1/2)			
LNAV/VNAV DA	7443-1/2 300 (300-1/2)		7443-3/4 300 (300-3/4)	
LNAV MDA	7520-1/2 377 (400-1/2)		7520-1 377 (400-1)	
CIRCLING	7680-1 537 (600-1)	7760-1 617 (700-1)	7800-1 3/4 657 (700-1 3/4)	8000-2 3/4 857 (900-2 3/4)

REIL Rwy 5
HIRL Rwy 5-23