


LOC I-AEG	APP CRS	Rwy Idg	7398
110.1	215°	TDZE	5817
		Apt Elev	5837

ILS or LOC RWY 22

DOUBLE EAGLE II (A/E/G)

⚠ NA When local altimeter setting not received, use Albuquerque Intl Support altimeter setting and increase all DA 94 feet, increase all MDA 100 feet, and increase visibility S-LOC 22 Cats C/D ¼ mile, Circling Cats C/D ½ mile. For inop MALSR when using Albuquerque Intl Support altimeter setting, increase visibility S-ILS 22 all Cats ¾ mile.	MALSR	MISSED APPROACH: Climb to 6500 then climbing right turn 7700 direct DUDLE LOM and hold.
---	------------------------------	---

ATIS	ALBUQUERQUE APP CON	DOUBLE EAGLE II TOWER ★	GND CON	CLNC DEL
119.025	127.4 253.5	120.15 (CTAF) 0	121.625	124.8 (When twr closed)

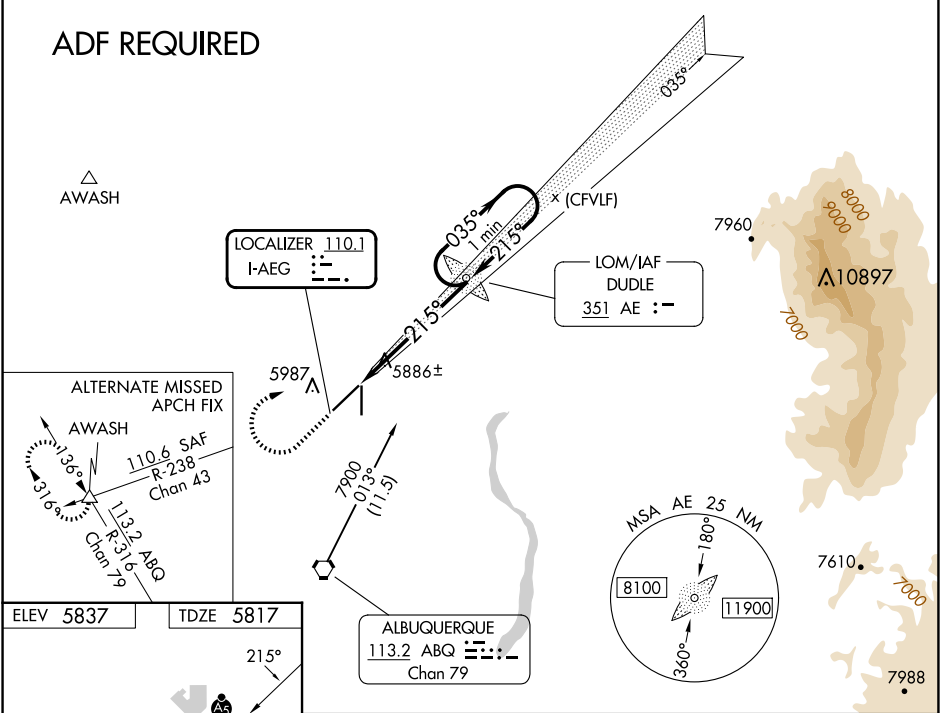

6500	7700	AE		
		AE LOM 7629	One Minute Holding Pattern	
		035°	7700	
		215°	7700	
		GS 3.00°	TCH 55	
		5.5 NM		
CATEGORY	A	B	C	D
S-ILS 22	6017-½ 200 (200-½)			
S-LOC 22	6140-½ 323 (400-½)			
☒ CIRCLING	6400-1 563 (600-1)		6420-1½ 583 (600-1½)	6640-2½ 803 (900-2½)

SW-1, 04 SEP 2025 to 02 OCT 2025

SW-1, 04 SEP 2025 to 02 OCT 2025