

WAAS CH 93838 W27A	APP CRS 270°	Rwy Idg 4043 TDZE 1240 Apt Elev 1243
--	------------------------	--


RNAV (GPS) RWY 27
CUMBERLAND MUNI (UBE)

RNP APCH - GPS.


A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Rice Lake altimeter setting. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Rice Lake altimeter setting; increase LPV DA to 1533 feet and LNAV/VNAV DA to 1549 feet and all MDA 60 feet; increase LPV all Cats visibility and LNAV Cat C/D visibility ½ mile; increase Circling Cat D visibility ¼ mile. Circling Rwy 18, 36 NA at night.

MISSED APPROACH:
Climb to 3400 direct
DESTE and hold.

AWOS-3PT 119.175	MINNEAPOLIS CENTER 125.3 335.6	GCO 121.725	UNICOM 122.8 (CTAF) 
----------------------------	--	-----------------------	---

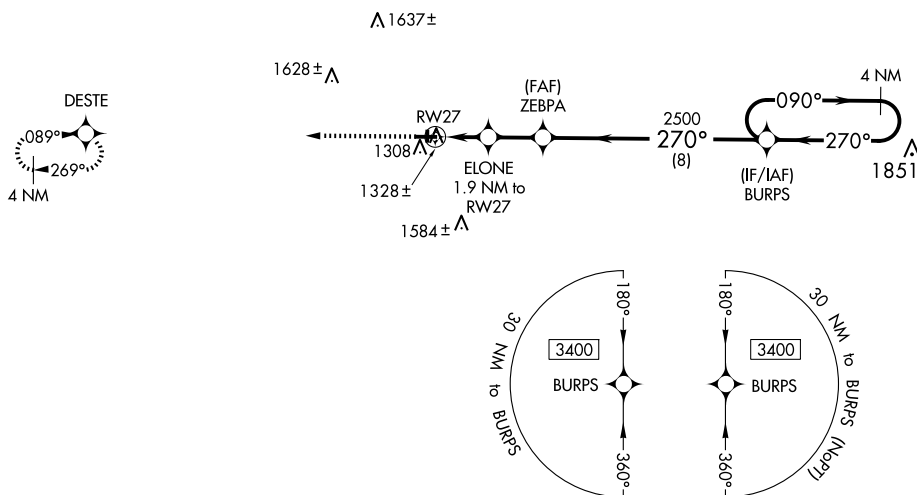

ELEV	1243		TDZE	1240
------	------	--	------	------

[illegible]RFII R_{wys} 9 and 27 MIRL Rwy 9-27 **L**