

LOC I-JZW 110.95	APP CRS 357°	Rwy Idg TDZE Apt Elev	6002 697 700
----------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 36L

FORT WORTH SPINKS (FWS)

RADAR required for procedure entry.

NA



Circling NA west of Rwy 18R-36L. For inop ALS increase S-LOC 36L Cat C/D visibility to 1¼ SM.

MALSR

AS

MISSED APPROACH: Climb to 1800 then climbing left turn to 3100 on heading 269° and FUZ VORTAC R-222 to SLUGG INT/ FUZ 37.5 DME and hold.

ATIS 120.025	LONE STAR APP CON 135.975 379.9	SPINKS TOWER ★ 124.625 (CTAF) 0	GND CON 119.475	UNICOM 122.7
------------------------	---	--	---------------------------	------------------------

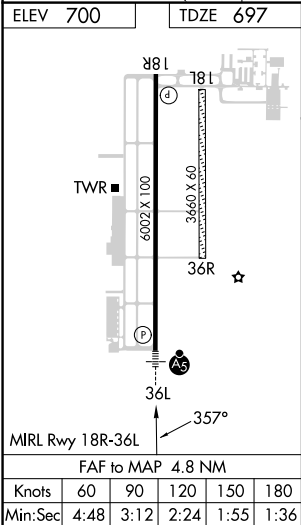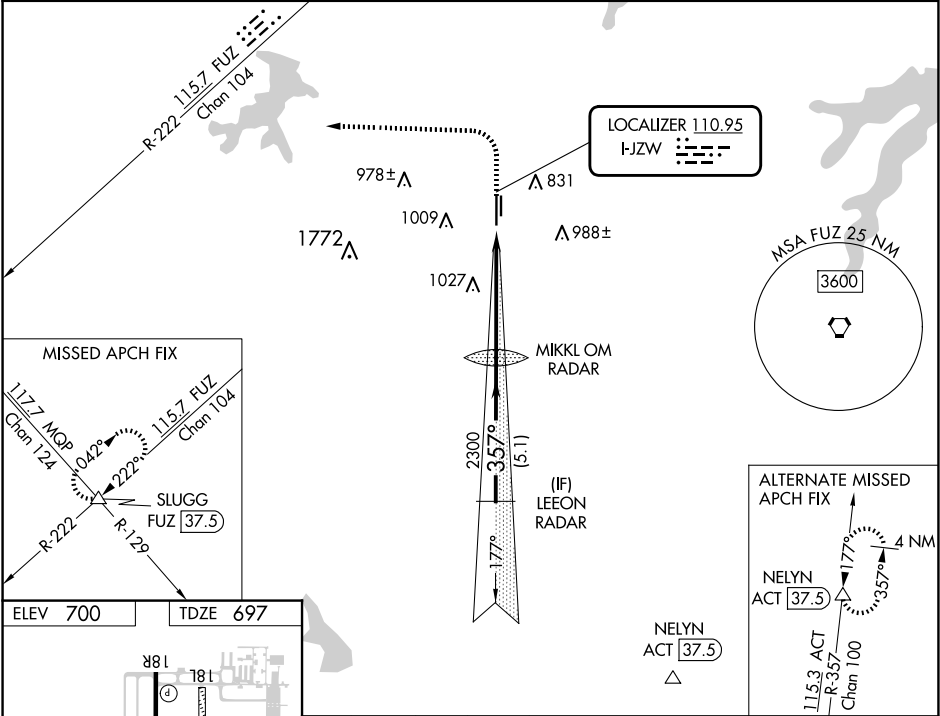

	1800	3100	FUZ R-222	SLUGG	MIKKL OM RADAR	LEEON RADAR
	↑	hdg 269°		△	2278	
					357°	2300
					2300	GS 3.00° TCH 50
					4.8 NM	5.1 NM
CATEGORY	A	B	C	D		
S-ILS 36L	897-½ 200 (200-½)					
S-LOC 36L	1320-½ 623 (700-½)		1320-1¾ 623 (700-1¾)			
CIRCLING	1320-1 620 (700-1)		1340-1¾ 640 (700-1¾)		1340-2 640 (700-2)	