

WAAS CH 53714 W16A	APP CRS 159°	Rwy Idg TDZE 2160 Apt Elev 2160
--	------------------------	---

RNAV (GPS) RWY 16

PIONEER VILLAGE FLD (ØV3)


⚠

NA


Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Kearney altimeter setting; when not received, use Holdrege altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility ¼ mile. Circling NA to Rwy 5/23.

MISSED APPROACH: Climb to 3700 direct MEDOC and hold.

EAR AWOS-3PT 123.875	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.7 (CTAF) 0
--------------------------------	--	---------------------------------

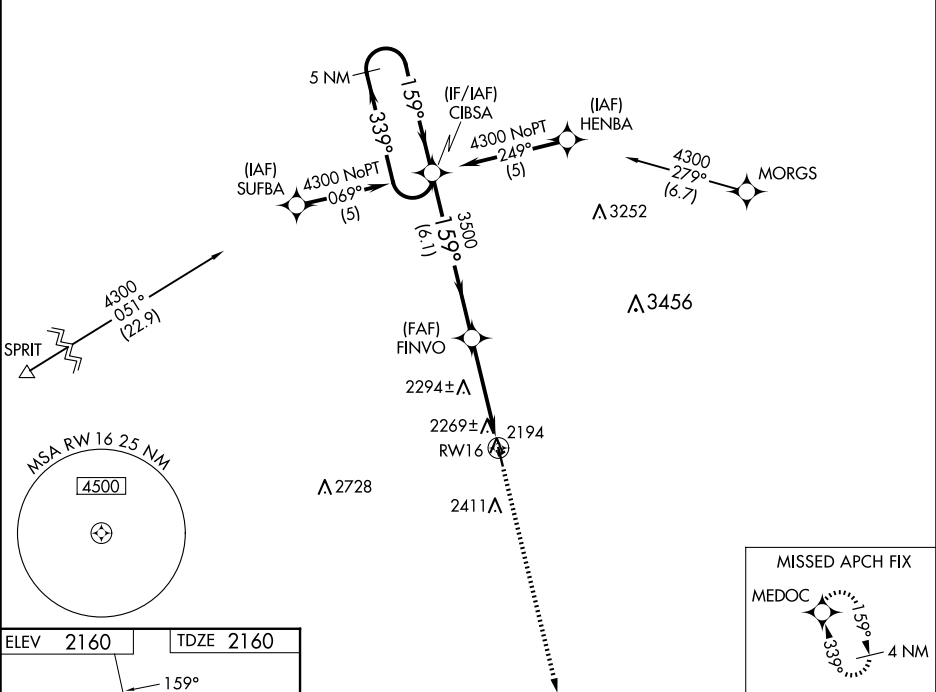

ELEV 2160	TDZE 2160
------------------	------------------

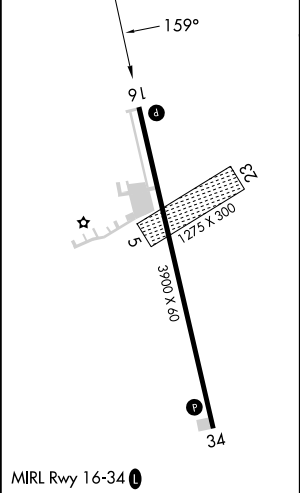

5 NM Holding Pattern 3700 MEDOC ↑			
GP 3.00° TCH 40 4300 ← 339° 159° → 3500 FINVO RW16 6.1 NM 4.1 NM			
CATEGORY	A	B	C D
LPV DA	2445-1	285 (300-1)	NA
LNAV/VNAV DA	2574-1½	414 (500-1½)	NA
LNAV MDA	2580-1	420 (500-1)	NA
CIRCLING	2680-1 520 (600-1)	2780-1 620 (700-1)	NA

NC-2, 04 SEP 2025 to 02 OCT 2025

NC-2, 04 SEP 2025 to 02 OCT 2025