

WAAS CH 90535 W17A	APP CRS 174°	Rwy Idg 4000 TDZE 600 Apt Elev 600
--	------------------------	---


RNAV (GPS) RWY 17
TAYLOR MUNI (T74)

RNP APCH.

T For uncompensated Baro-VNAV systems, INAV/VNAV NA below -16C or above 54C. When local altimeter setting not received, use Austin Exec altimeter setting and increase all DA to 914 feet and all MDA 40 feet. VDP and Baro-VNAV NA when using Austin Exec altimeter setting.

MISSED APPROACH: Climb to 1100 then climbing right turn to 3100 direct CWK VORTAC and hold.

AWOS-3PT 119.75	AUSTIN APP CON 127.225 317.65	UNICOM 122.8 (CTAF)
---------------------------	---	-------------------------------

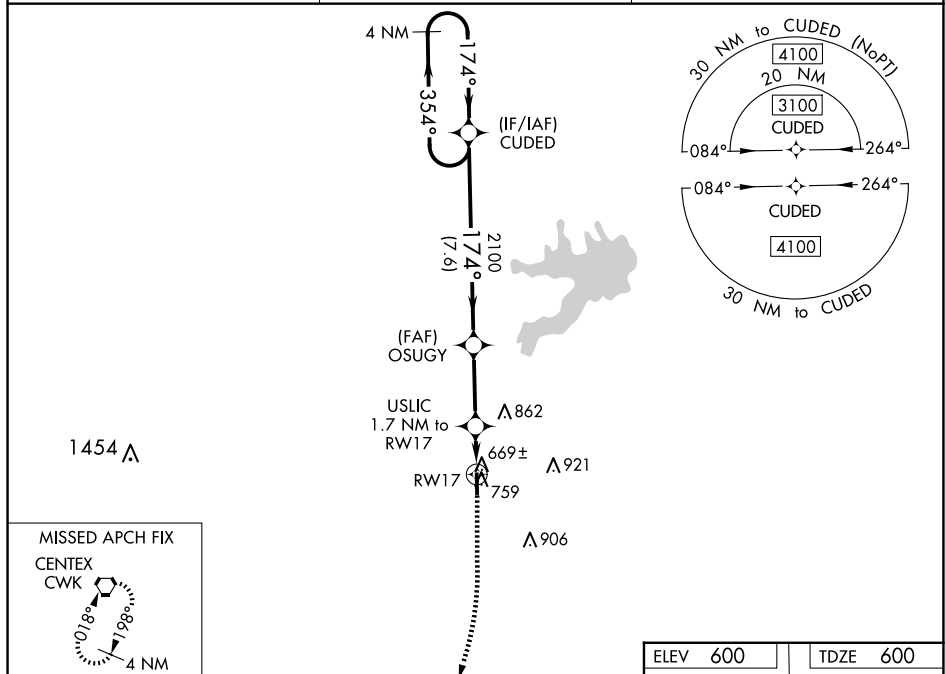

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 40).

4 NM Holding Pattern

CUDED

OSUGY

3100

354°

174°

174°

2100

2100

7.6 NM

2.9 NM

1.180

1 NM to RW17

0.7

1 NM

USLIC 1.7 NM to RW17

* LNAV only.

CATEGORY	A	B	C	D
LPV DA	882-7/8	282 (300-7/8)	NA	
LNAV/ VNAV DA	882-7/8	282 (300-7/8)	NA	
LNAV MDA	960-1	360 (400-1)	NA	
C CIRCLING	1100-1	500 (500-1)	NA	

