


|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>53614</b><br><b>W30A</b> | APP CRS<br><b>303°</b> | Rwy Idg <b>4105</b><br>TDZE <b>1147</b><br>Apt Elev <b>1147</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|

RNAV (GPS) RWY 30


HAROLD DAVIDSON FLD (VMR)

|           |                                                 |                                                       |
|-----------|-------------------------------------------------|-------------------------------------------------------|
| RNP APCH. |                                                 | MISSED APPROACH: Climb to 3500 direct WAPIR and hold. |
| NA        | Baro-VNAV NA.<br>Use Yankton altimeter setting. |                                                       |

|                          |                               |                                           |                                  |
|--------------------------|-------------------------------|-------------------------------------------|----------------------------------|
| AWOS-3P<br><b>118.65</b> | YKN AWOS-3PT<br><b>119.05</b> | SIoux CITY APP CON★<br><b>124.6 307.0</b> | AUNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|-------------------------------|-------------------------------------------|----------------------------------|

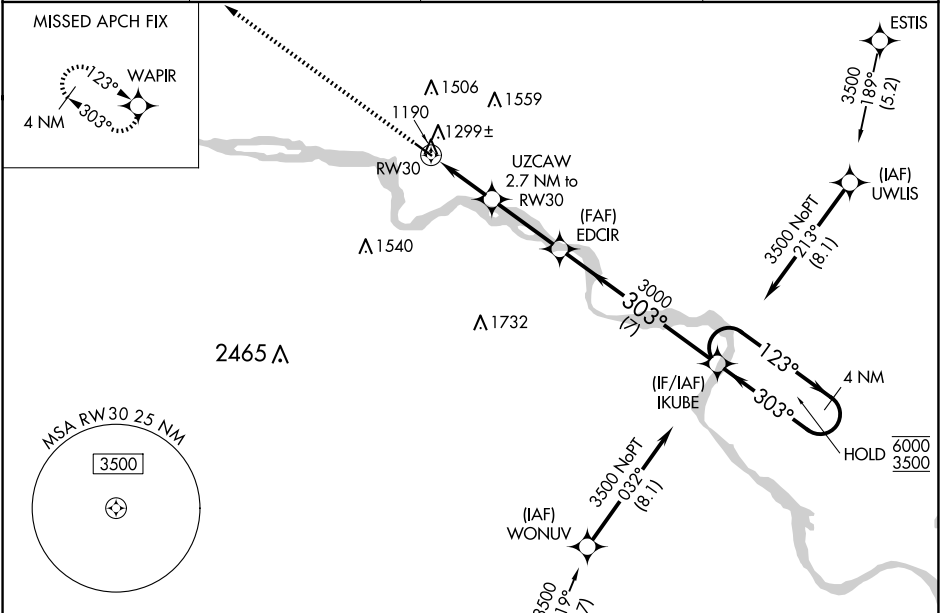

|           |           |
|-----------|-----------|
| ELEV 1147 | TDZE 1147 |
|-----------|-----------|

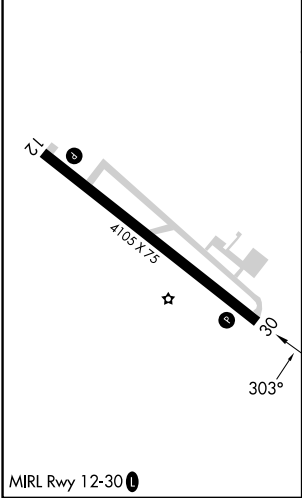

|              |        |                      |             |       |                         |                            |
|--------------|--------|----------------------|-------------|-------|-------------------------|----------------------------|
| 3500 WAPIR   |        | UZCAW 2.7 NM to RW30 |             | EDCIR | IKUBE                   | 4 NM Holding Pattern       |
| * LNAV only  |        | RW30                 |             | 2040* | 3000                    | 123° → 6000<br>← 303° 3500 |
|              |        | 2.7 NM               |             | 3 NM  | 7 NM                    | GP 3.00°<br>TCH 38         |
| CATEGORY     | A      | B                    | C           | D     |                         |                            |
| LPV DA       | 1470-1 |                      | 323 (400-1) |       | NA                      |                            |
| LNAV/VNAV DA | 1487-1 |                      | 340 (400-1) |       | NA                      |                            |
| LNAV MDA     | 1580-1 |                      | 433 (500-1) |       | 1580-1¼<br>433 (500-1¼) |                            |
| CIRCLING     | 1760-1 |                      | 613 (700-1) |       | 1900-2¼<br>753 (800-2¼) |                            |