


WAAS CH 56440 W06A	APP CRS 058°	Rwy Idg TDZE Apt Elev	3396 574 575
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6
PAGELAND (PYG)

Baro-VNAV NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 943 feet and all visibilities 1/8 SM. Increase LNAV/VNAV DA to 1139 feet and all visibilities 1/4 SM. Increase all MDA 60 feet.	MISSED APPROACH: Climb to 2400 direct WOVEX and hold.
---	---

EQY ASOS 135.775	CHARLOTTE APP CON 120.05 307.8	(CTAF) 122.9
----------------------------	--	------------------------

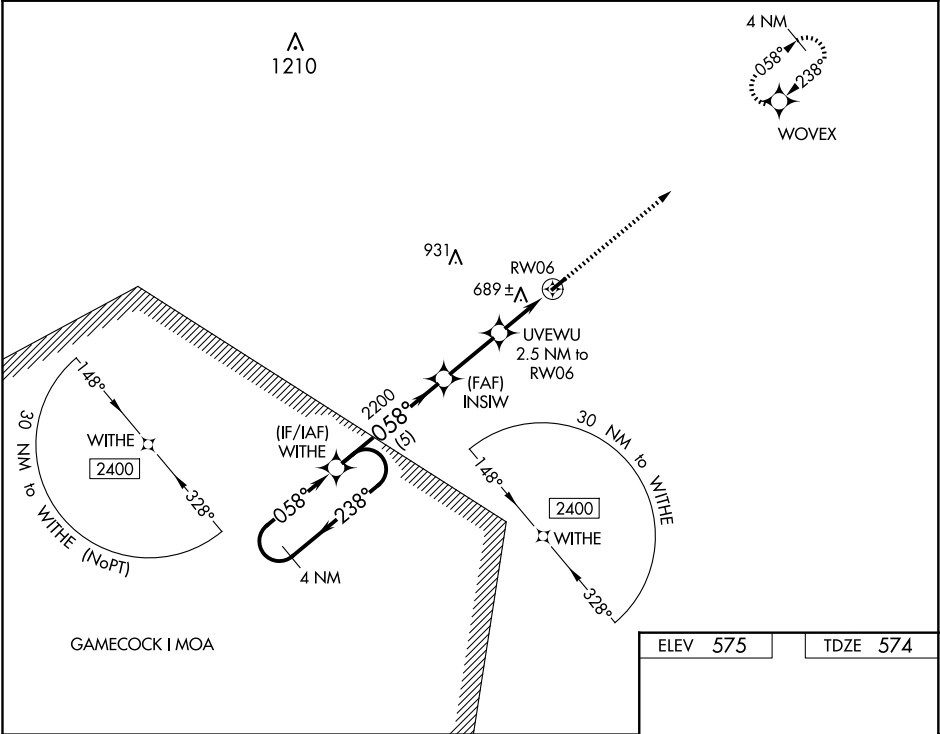

4 NM Holding Pattern		WITHE		INSIV		UVEWU		RW06	
2400		238°		058°		058°		2200	
GP 3.00°		TCH 40		2200		*1380		2.5 NM	
CATEGORY		A		B		C		D	
LPV DA		889-1 1/8		315 (400-1 1/8)		NA		NA	
LNAV/VNAV DA		1085-1 7/8		511 (600-1 7/8)		NA		NA	
LNAV MDA		1020-1		446 (500-1)		NA		NA	
CIRCLING		1100-1 7/8		525 (600-1 7/8)		NA		NA	