


|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>99743</b><br><b>W06A</b> | APP CRS<br><b>060°</b> | Rwy Idg <b>5509</b><br>TDZE <b>861</b><br>Apt Elev <b>882</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 6

ATLANTA SPEEDWAY (HMP)

|                                                                              |                                           |                                    |                                                       |
|------------------------------------------------------------------------------|-------------------------------------------|------------------------------------|-------------------------------------------------------|
| RNP APCH.                                                                    |                                           |                                    | MISSED APPROACH: Climb to 2600 direct YEBUT and hold. |
| For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. |                                           |                                    |                                                       |
| AWOS-3<br><b>124.825</b>                                                     | ATLANTA APP CON<br><b>128.575 343.675</b> | CLNC DEL<br><b>128.575 343.675</b> | UNICOM<br><b>122.725 (CTAF)</b>                       |

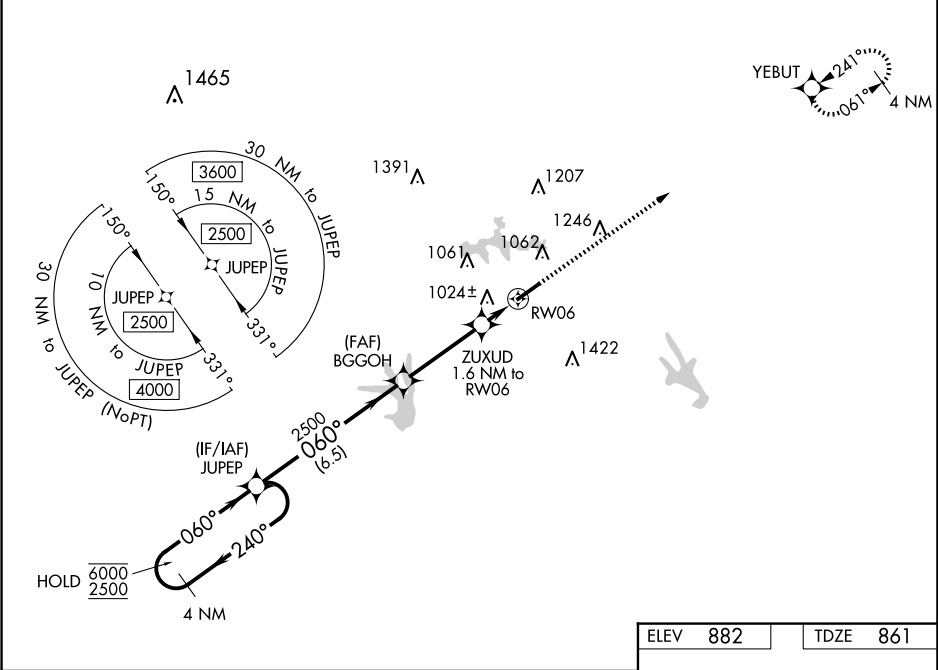

|                      |  |                       |  |                       |  |                         |  |                         |  |
|----------------------|--|-----------------------|--|-----------------------|--|-------------------------|--|-------------------------|--|
| 4 NM Holding Pattern |  | JUPEP                 |  | BGGOH                 |  | ZUXUD                   |  | RWY 06                  |  |
| 6000<br>2500         |  | 2500                  |  | 2500                  |  | 1400                    |  |                         |  |
| GP 3.00°<br>TCH 44   |  | 6.5 NM                |  | 3.4 NM                |  | 1.6 NM                  |  |                         |  |
| CATEGORY             |  | A                     |  | B                     |  | C                       |  | D                       |  |
| LPV DA               |  | 1061-¾                |  | 200 (200-¾)           |  |                         |  |                         |  |
| LNAV/VNAV DA         |  | 1185-1                |  | 324 (400-1)           |  |                         |  |                         |  |
| LNAV MDA             |  | 1280-1                |  | 419 (400-1)           |  | 1280-1½                 |  | 419 (400-1½)            |  |
| CIRCLING             |  | 1380-1<br>498 (500-1) |  | 1400-1<br>518 (600-1) |  | 1700-2½<br>818 (900-2½) |  | 1740-2¾<br>858 (900-2¾) |  |

