

WAAS CH 93910 W27A	APP CRS 272°	Rwy Idg 4300 TDZE 22 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 27L

NORTH PALM BEACH COUNTY GENERAL AVIATION (F45)


▼

▲ NA


Circling NA to Rwy 9L and 27R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Palm Beach Init altimeter setting. DME/DME RNP-0.3 NA. When local altimeter not received, use Palm Beach Init altimeter setting and increase LPV DA to 369 feet and all visibilities 1⁄8 SM; increase LNAV/VNAV DA to 423 feet and all visibilities 1⁄8 SM; increase all MDA 40 feet and Cat C/D visibility 1⁄8 SM. Rwy 27L helicopter visibility reduction below 3⁄8 SM NA.

MISSED APPROACH:
Climb to 2500 direct YIGBO and hold.

AWOS-3 119.975	PALM BEACH APP CON 128.3 317.4	CLNC DEL 120.825	UNICOM 123.075 (CTAF) 0
--------------------------	--	----------------------------	-----------------------------------

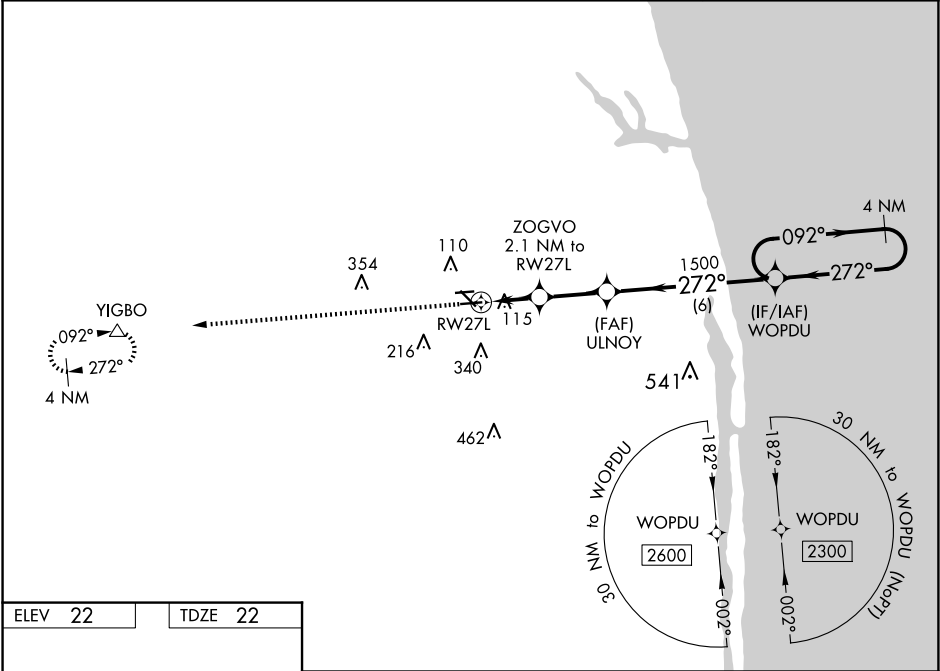

ELEV 22	TDZE 22
---------	---------



2500 YIGBO
▲

*LNAV only.

ZOGVO 2.1 NM to RW27L
ULNOY 1500
RW27L
WOPDU 4 NM Holding Pattern

1 NM 1.1 NM 2.4 NM 6 NM

GP 3.00°
TCH 40

CATEGORY	A	B	C	D
LPV DA	341-7⁄8	319 (400-7⁄8)		
LNAV/VNAV DA	395-1	373 (400-1)		
LNAV MDA	380-1	358 (400-1)		
CIRCLING	460-1 438 (500-1)	480-1 458 (500-1)	700-2 678 (700-2)	720-2¼ 698 (700-2¼)