

WAAS CH 61137 W36A	APP CRS 001°	Rwy Idg TDZE 736 Apt Elev 738	4894 736 738
--	------------------------	---	---



RNAV (GPS) RWY 36

RANTOUL NTL AVN CNTR-FRANK ELLIOTT FLD (TIP)


▼ Baro-VNAV NA when using Champaign Urbana altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign Urbana altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1⁄8 mile and LNAV and Circling Cats C/D visibility 1⁄4 mile. Helicopter visibility reduction below 3⁄4 SM NA.

MISSED APPROACH:
Climb to 3000 direct
ALADE and hold.

AWOS-3 119.025	CHAMPAIGN APP CON ★ 121.35 285.65	UNICOM 123.0 (CTAF) ①
--------------------------	---	---------------------------------

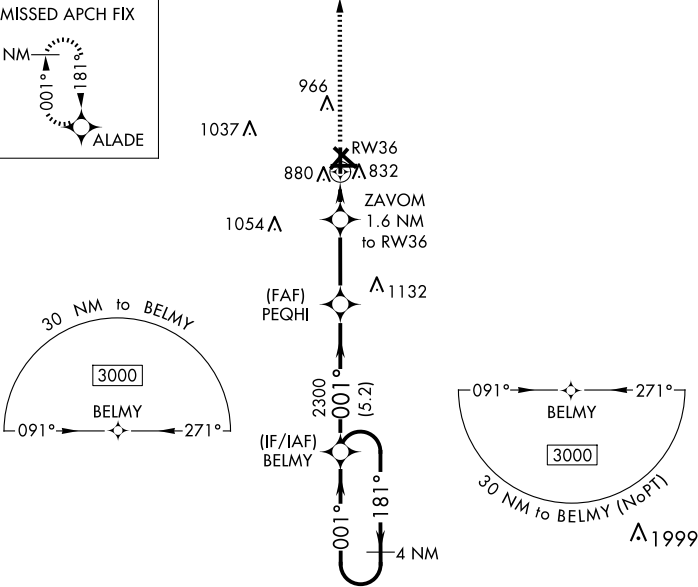

ELEV 738	TDZE 736
REIL Rwy 9 and 27 ①	MIRL Rwy 9-27 and 18-36 ②



3000 ↑		ALADE 		BELMY 4 NM Holding Pattern	
*LNAV only		ZAVOM 1.6 NM to RW36		PEQHI 2300	
RW36 		1280*		001° 181° → ← 001° 3000	
1.6 NM		3.2 NM		5.2 NM	
CATEGORY		A		B	
LPV DA		986-1		250 (300-1)	
LNAV/VNAV DA		1147-1³/₈		411 (500-1³/₈)	
LNAV MDA		1140-1		404 (500-1)	
1220-1		1280-1		1380-1³/₄	
482 (500-1)		542 (600-1)		642 (700-1³/₄)	
1420-2¹/₄		682 (700-2¹/₄)			