


WAAS CH 97537 W25A	APP CRS 248°	Rwy Ldg TDZE 661 Apt Elev 661
--	------------------------	---

RNAV (GPS) RWY 25

PIKE COUNTY (EOP)

RNP APCH - GPS	MISSED APPROACH: Climb to 1120 then climbing left turn to 3000 direct IGMiy and hold.
Rwy 25 helicopter visibility reduction below ¾ SM NA. Circling Rwy 7 NA at night. When local altimeter setting not received, use PMH altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM, and LP visibility Cat C/D ½ SM, and Circling visibility Cat A/B/C ¼ SM. VDP NA when using PMH altimeter setting.	

AWOS-3PT 121.45	INDIANAPOLIS CENTER 135.575 290.5	UNICOM 123.0 (CTAF)
---------------------------	---	-------------------------------

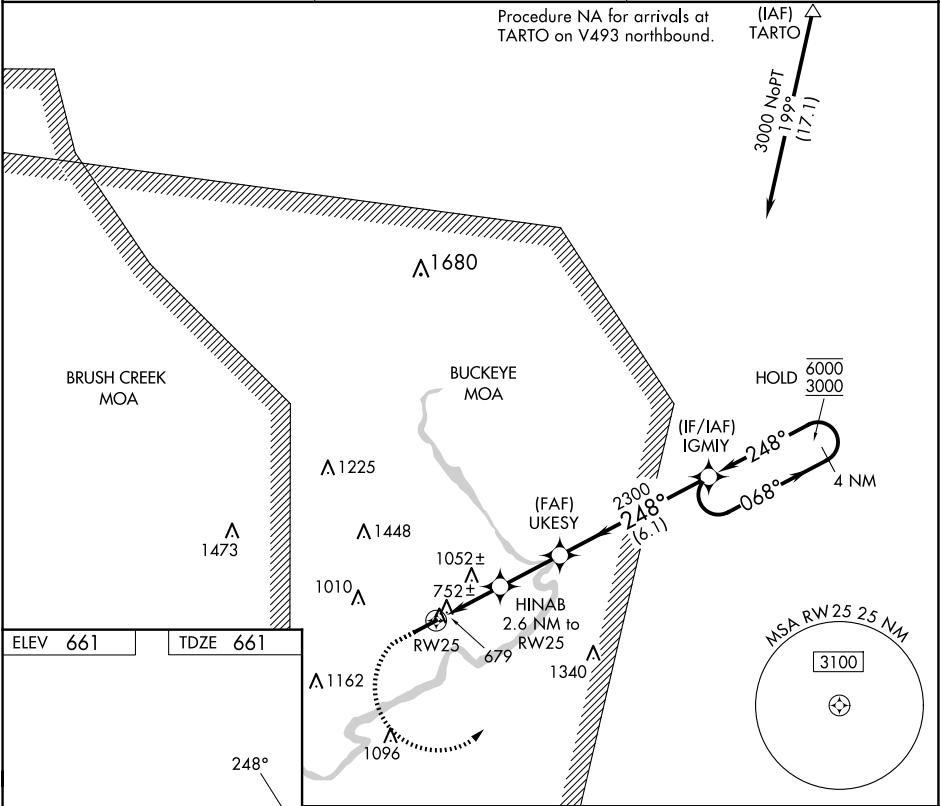

1120

↑

3000

↶

IGMIY

✧

VGSI and descent angles not coincident
(VGSI Angle 3.00/TCH 25).

IGMIY

4 NM

Holding Pattern

UKESY

✖

2300

248°

HINAB

2.6 NM to RW25

1.1 NM to RW25

1.1 NM

1.6 NM

2.4 NM

6.1 NM

1520

3.00°

TCH 40

068°

6000

248°

3000

CATEGORY	A		B		C		D	
LP MDA			1020-1		359 (400-1)			
LNAV MDA	1280-1		619 (700-1)		1280-1¾		619 (700-1¾)	
CIRCLING	1440-1 779 (800-1)		1460-1 799 (800-1)		1500-2½ 839 (900-2½)		1640-3 979 (1000-3)	

REIL Rwy 7 and 25

MIRL Rwy 7-25