

WAAS

CH **86540**

W27A

APP CRS

274°

Rwy Ldg

4650

TDZE

1463

Apt Elev

1465

RNAV (GPS) RWY 27

PIKE COUNTY/HATCHER FLD (PBX)

RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 27 helicopter visibility reduction below ¾ SM NA. Circling NA to Rws 2 and 20.

MISSED APPROACH: Climb to 4500 direct CILOM and hold, continue climb-in-hold to 4500.

AWOS-3PT


121.225

INDIANAPOLIS CENTER

126.575 257.85

UNICOM


122.8 (CTAF) 0

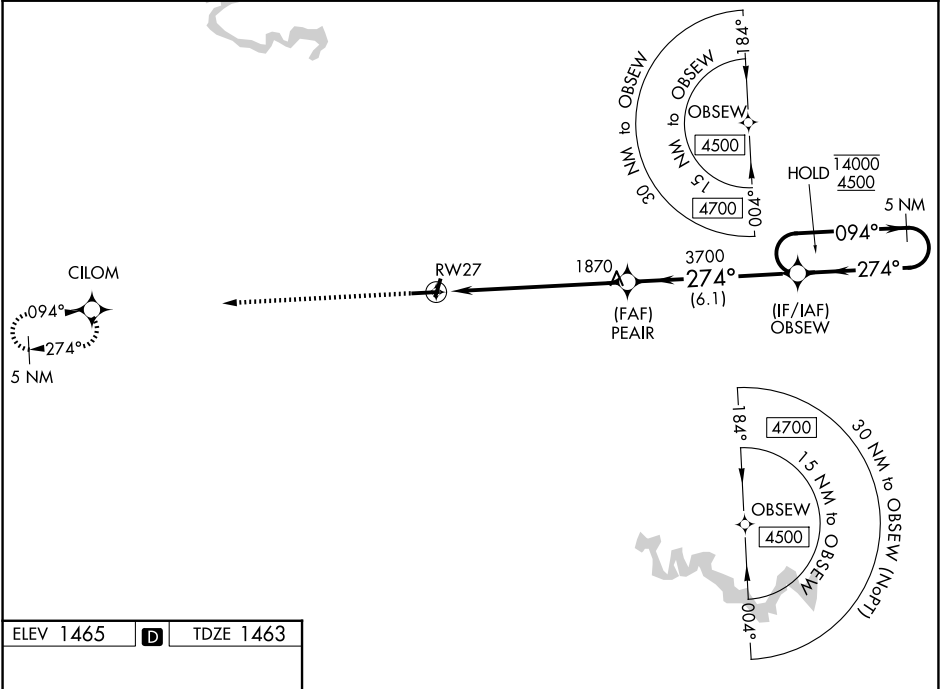

ELEV **1465**

D

TDZE **1463**



4500

CILOM

PEAIR

3700

274°

OBSEW

5 NM Holding Pattern

094°

274°

14000

4500

GP 3.00°

TCH 47

1.9

5 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA		1722-1	259 (300-1)	
LNAV/VNAV DA		2120-1½	657 (700-1½)	
LNAV MDA	2120-1	657 (700-1)	2120-1½	657 (700-1½)
CIRCLING	2120-1 655 (700-1)	2180-1 715 (800-1)	2180-2 715 (800-2)	2460-3 995 (1000-3)